


MDE 2011 FRAMES TECH INFO


MDE 69 DH 2011 GEOMETRY

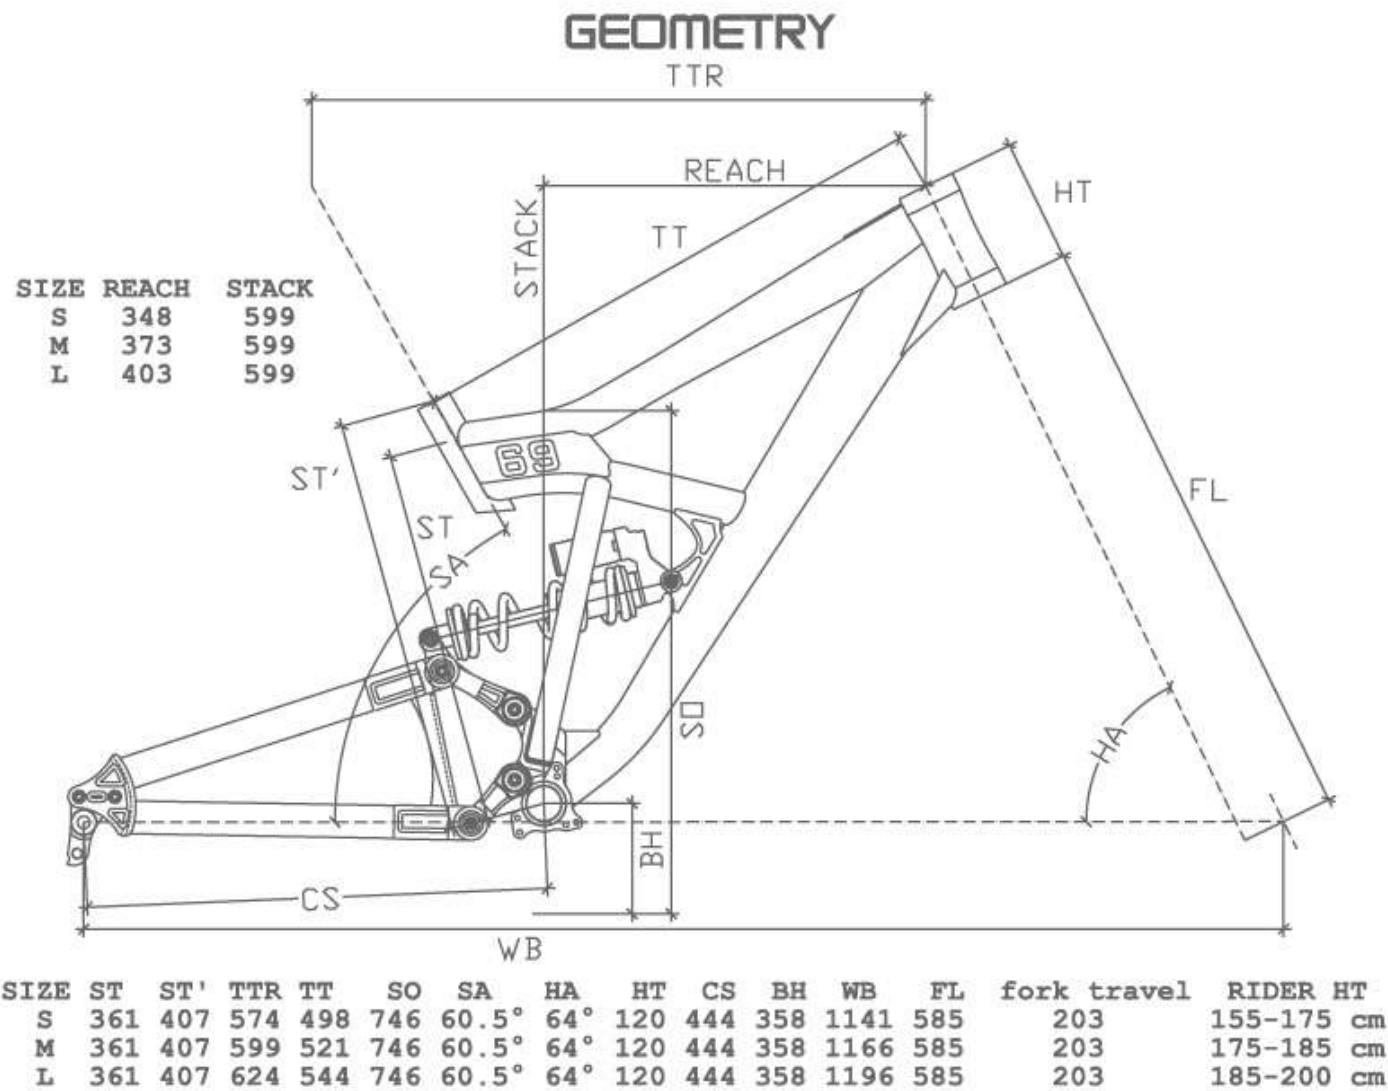

MDE 69 DH 2011 FRAME SPECS

- Max Fork travel: 200MM(26"),
- Rear Shock Size: 241mm X 76mm
- Shock Hardware: 22mm X 8mm rear, 22mm X 8mm front
- Rear travel:210mm
- Headset (Top): 49mm ZERO STACK (1,5")
- Headset (Bottom): 49mm ZERO STACK (1,5")
- BB Shell: 83mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle: 150X12mm Thru
- Front Derailleur: NONE
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 42T SINGLE
- Max Tire Size: 27.5"(650B)X 2.5


MDE PUSHER (26) 2011 GEOMETRY

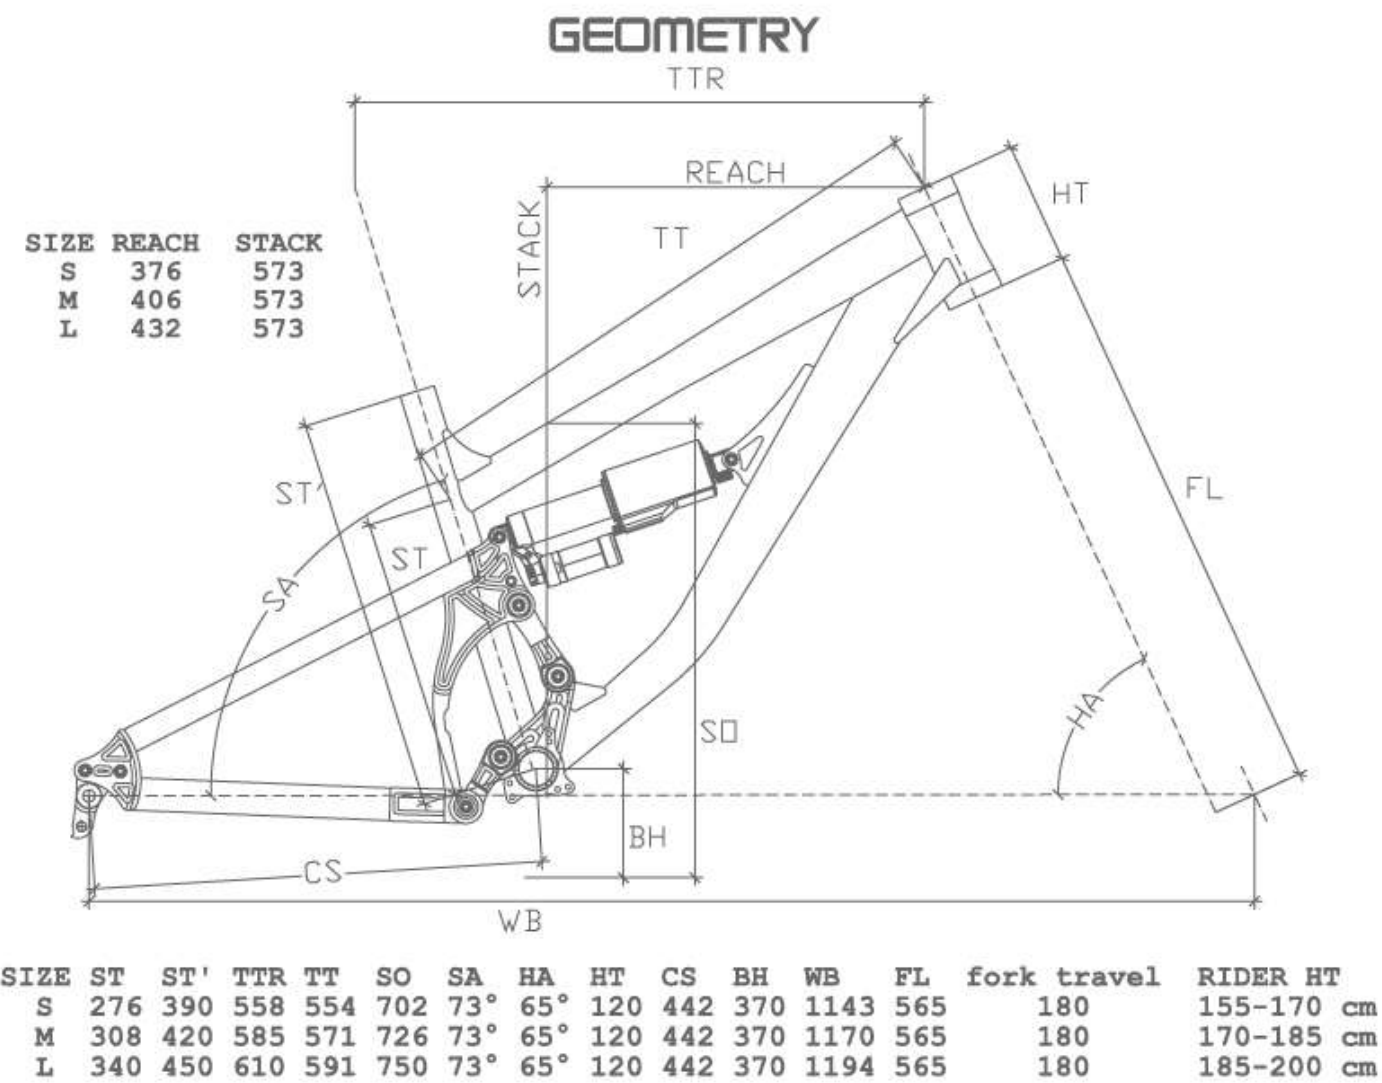

MDE PUSHER (26) 2011 FRAME SPECS

- Max Fork travel: 200MM(26")
- Rear Shock Size: 241mm X 76mm or 222x70mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:190mm
- Headset (Top): 49mm ZERO STACK (1,5")
- Headset (Bottom): 49mm ZERO STACK (1,5")
- BB Shell: 83mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Dropouts:MDS system-135x10QR,142X12mm,148x12mm, **150x12mm** (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 26"X 2.5


MDE PLAYER (26) 2011 GEOMETRY

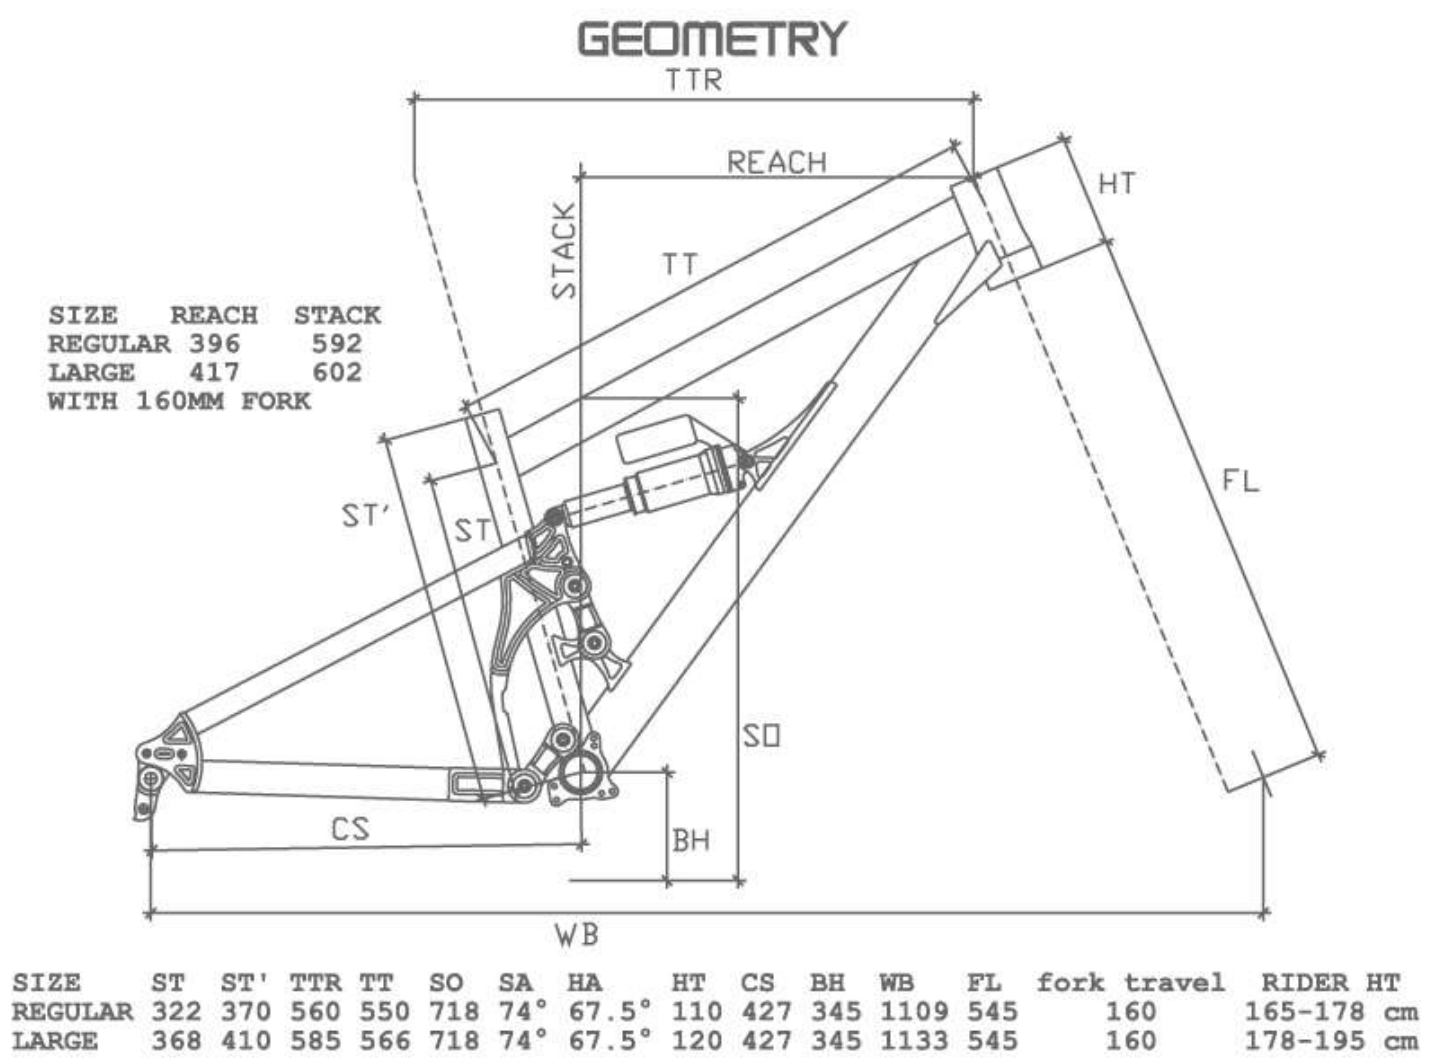

MDE PLAYER (26) 2011 FRAME SPECS

- Max Fork travel: 160mm(26")
- Rear Shock Size: 200mm X 57mm or 200x50mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:160mm or 110mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Dropouts:MDS system-135x10QR,142X12mm,148x12mm, **150x12mm** (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 26"X 2.5

MDE DAMPER SX (26) 2011 GEOMETRY

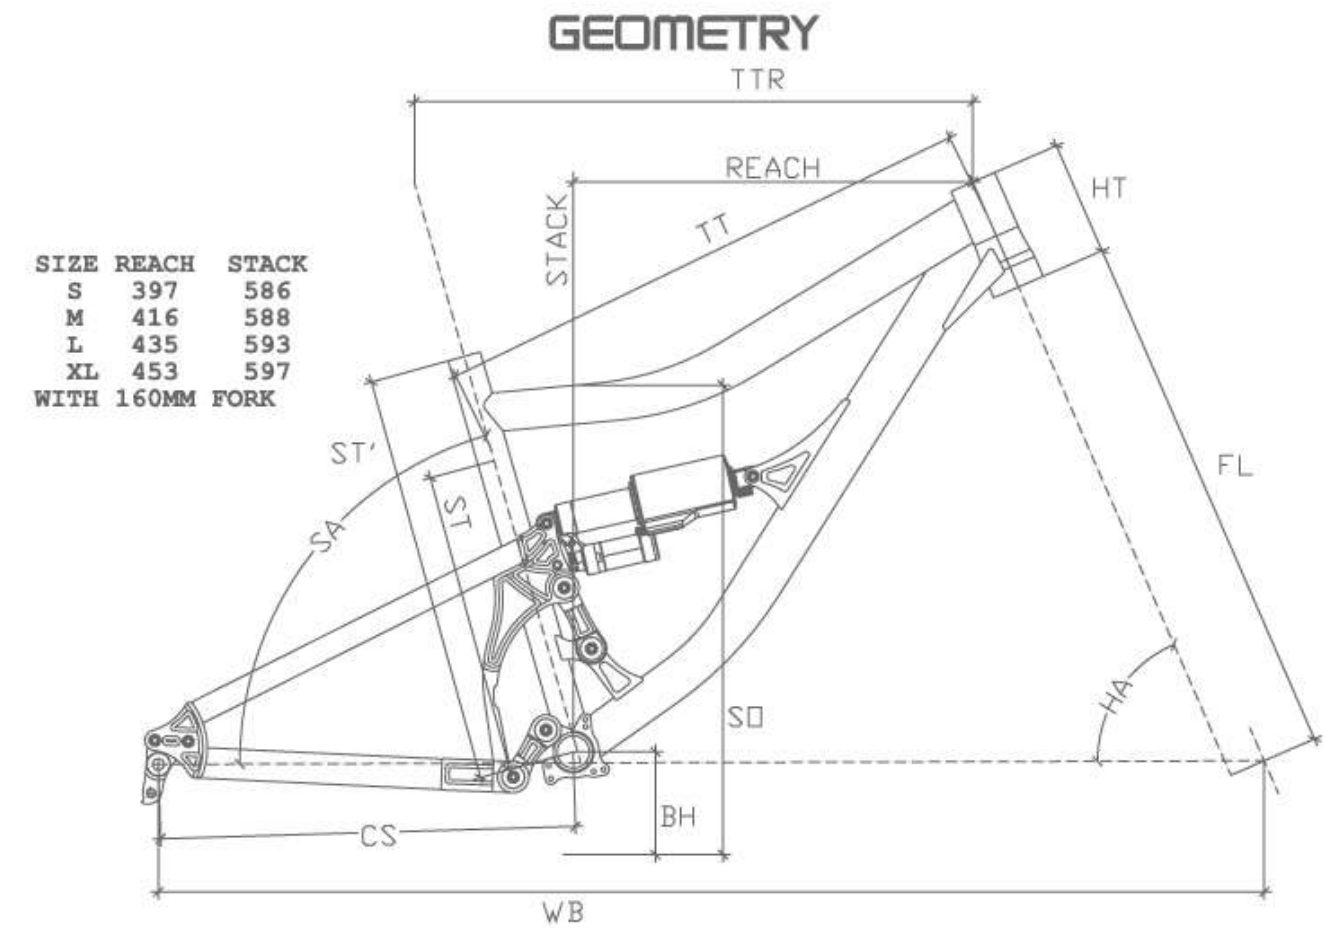

WHIT 160MM FORK,222X70MM REAR SHOX (170MM) AND WHIT STANDARD EXTERNAL HEADSET.															
SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT	
S	326	390	560	551	701	73.5°	67°	107	438	353	1132	545	160	150-165	cm
M	368	430	580	564	736	73.5°	67°	110	438	353	1152	545	160	165-175	cm
L	415	460	600	581	759	73.5°	67°	115	438	353	1173	545	160	175-185	cm
XL	429	490	620	601	783	73.5°	67°	120	438	353	1187	545	160	185-200	cm
WHIT ZERO STACK LOWER HEADSET SA=+0.5.															

OTHER GEOMETRY SETUP

WHIT 160MM FORK,216X63MM REAR SHOX (160MM) AND WHIT STANDARD EXTERNAL HEADSET.															
SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER	HT
S	326	390	561	551	694	73°	66.5°	107	438	349	1136	545	160	150-165	cm
M	368	430	581	564	729	73°	66.5°	110	438	349	1156	545	160	165-175	cm
L	415	460	601	581	752	73°	66.5°	115	438	349	1177	545	160	175-185	cm
XL	429	490	621	601	776	73°	66.5°	120	438	349	1191	545	160	185-200	cm
WHIT ZERO STACK LOWER HEADSET SA=+0.5.															

WHIT 170MM FORK,222X70MM REAR SHOX (170MM) AND WHIT STANDARD EXTERNAL HEADSET.															
SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER	HT
S	326	390	562	551	705	73°	66.5°	107	435	357	1138	555	170	150-165	cm
M	368	430	582	564	740	73°	66.5°	110	435	357	1158	555	170	165-175	cm
L	415	460	602	581	763	73°	66.5°	115	435	357	1179	555	170	175-185	cm
XL	429	490	622	601	787	73°	66.5°	120	435	357	1193	555	170	185-200	cm
WHIT ZERO STACK LOWER HEADSET SA=+0.5.															

WHIT 180MM FORK,222X70MM REAR SHOX (170MM) AND WHIT STANDARD EXTERNAL HEADSET.															
SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER	HT
S	326	390	562	551	709	72.5°	66°	107	435	361	1142	565	180	150-165	cm
M	368	430	582	564	744	72.5°	66°	110	435	361	1162	565	180	165-175	cm
L	415	460	602	581	767	72.5°	66°	115	435	361	1183	565	180	175-185	cm
XL	429	490	622	601	791	72.5°	66°	120	435	361	1197	565	180	185-200	cm
WHIT ZERO STACK LOWER HEADSET SA=+0.5.															



MDE DAMPER SX (26) 2011 FRAME SPECS


- Max Fork travel: 180MM(26")
- Rear Shock Size: 216mm X 63mm or 222x70mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:160mm or 170mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Dropouts:MDS system-135x10QR,142X12mm,148x12mm, **150x12mm** (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 26"X 2.5

MDE BOLDER SX (26) 2011 GEOMETRY

GEOMETRY

ALL-MOUNTAIN SET		
SIZE	REACH	STACK
XS	371	579
S	389	585
M	417	585
L	442	585

FREERIDE SETTING		
SIZE	REACH	STACK
XS	367	582
S	381	588
M	417	588
L	438	588

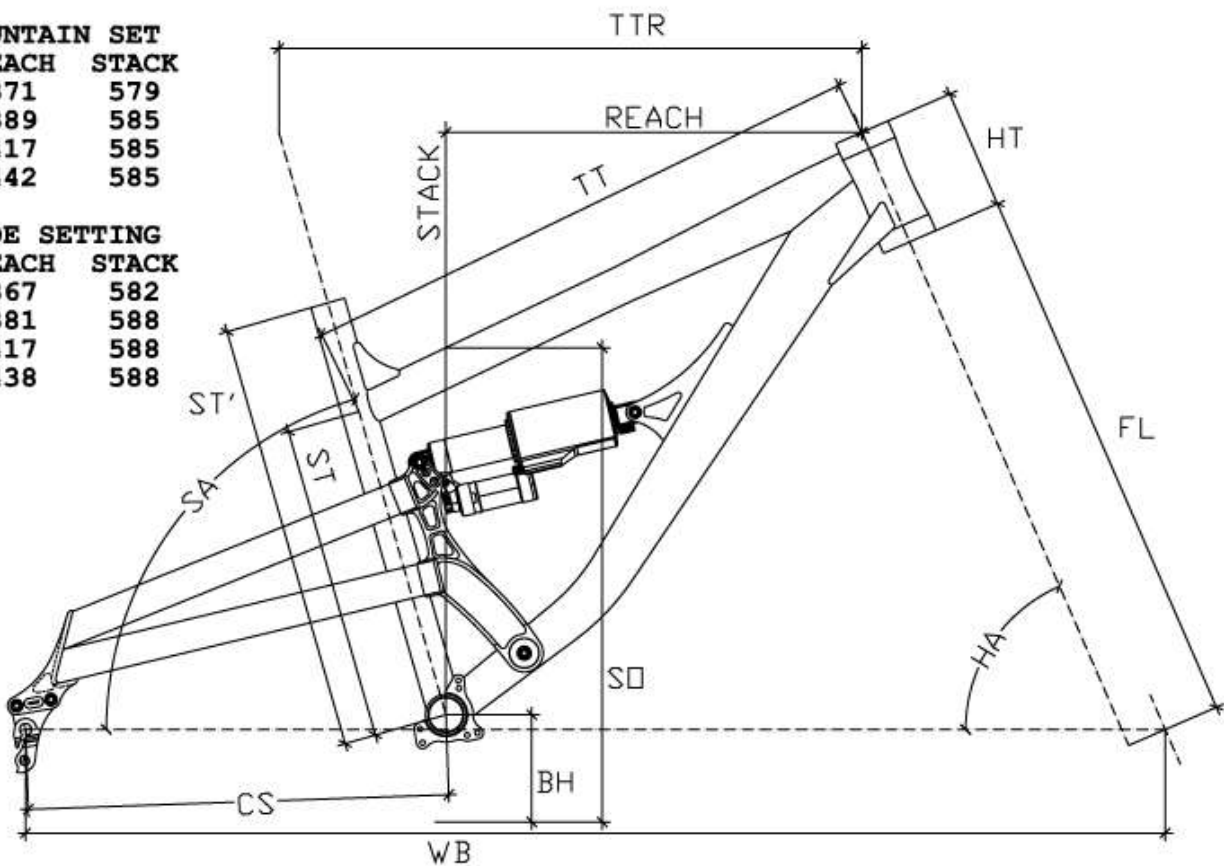

2011 GEOMETRY ALL-MOUNTAIN SETTING														
SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
XS	325	370	540	524	710	74°	66°	110	426	345	1100	545	160	145-160 cm
S	345	390	558	534	723	74°	66°	120	426	350	1118	545	160	160-170 cm
M	385	430	585	561	730	74°	66°	120	426	350	1142	545	160	170-185 cm
L	425	480	610	585	765	74°	66°	120	426	350	1166	545	160	185-200 cm
GEOMETRY WITH THE REAR SHOX IN THE REAR SWINGARM IN THE TOP FIXING POINT (160MM)														


2011 GEOMETRY FREERIDE SETTING														
SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
XS	325	370	542	524	730	73.5°	65.5°	110	422	365	1105	565	180	145-160 cm
S	345	390	560	534	743	73.5°	65.5°	120	422	370	1123	565	180	160-170 cm
M	385	430	590	561	750	73.5°	65.5°	120	422	370	1149	565	180	170-185 cm
L	425	480	615	585	785	73.5°	65.5°	120	422	370	1173	565	180	185-200 cm
GEOMETRY WITH THE REAR SHOX IN THE REAR SWINGARM IN THE LOW FIXING POINT (180MM)														



MDE BOLDER SX (26) 2011 FRAME SPECS

- Max Fork travel: 180MM(26")
- Rear Shock Size: 222x70mm
- Shock Hardware: 50mm X 8mm rear, 22mm X 8mm front
- Rear travel:160mm-170mm-180mm
- Headset (Top): 49mm ZERO STACK (1,5")
- Headset (Bottom): 49mm ZERO STACK (1,5")
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Dropouts:MDS system-135x10QR,142X12mm,148x12mm, **150x12mm** (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 26"X 2.5


MDE DAMPER (26) 2011 GEOMETRY

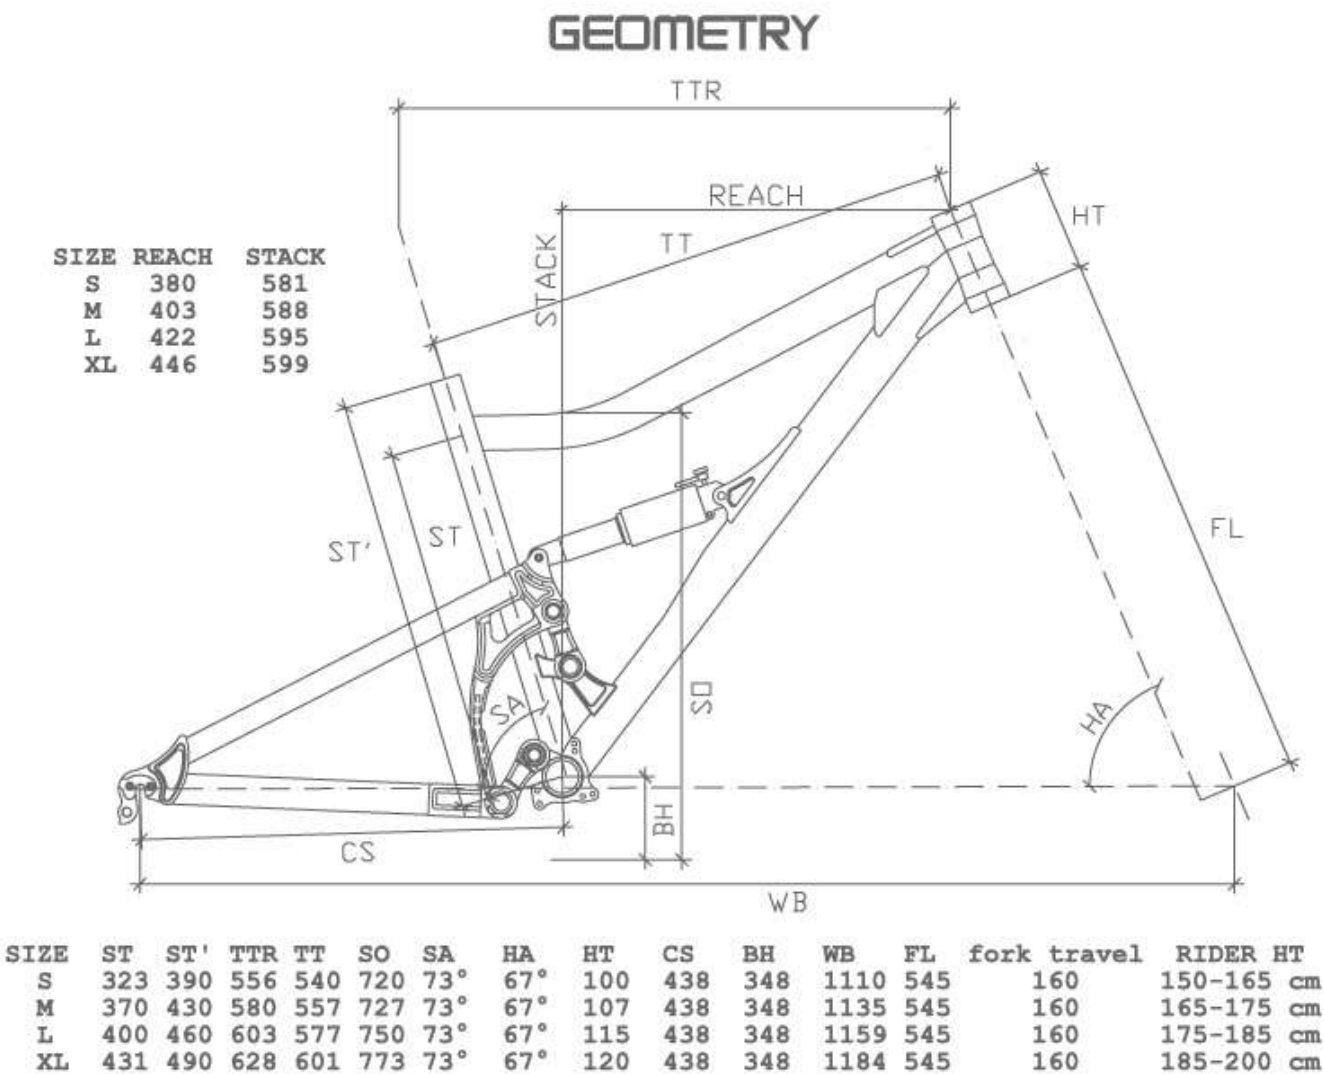

MDE DAMPER (26) 2011 FRAME SPECS

- Max Fork travel: 160MM(26")
- Rear Shock Size: 200mm X 57mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:158mm
- Headset (Top): 34mm EXTERNAL CUP (1" 1/8)
- Headset (Bottom): 34mm EXTERNAL CUP (1" 1/8)
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm I.S
- Rear Dropouts: **135x10QR**
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.31,8mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 27,2mm
- Seat Clamp: 31,8mm
- Max Chainring Size: 36t Single or 38-26 Double or 48-36-26 Triple
- Max Tire Size: 26"X 2.30


MDE CARVE AM(26) 2011 GEOMETRY

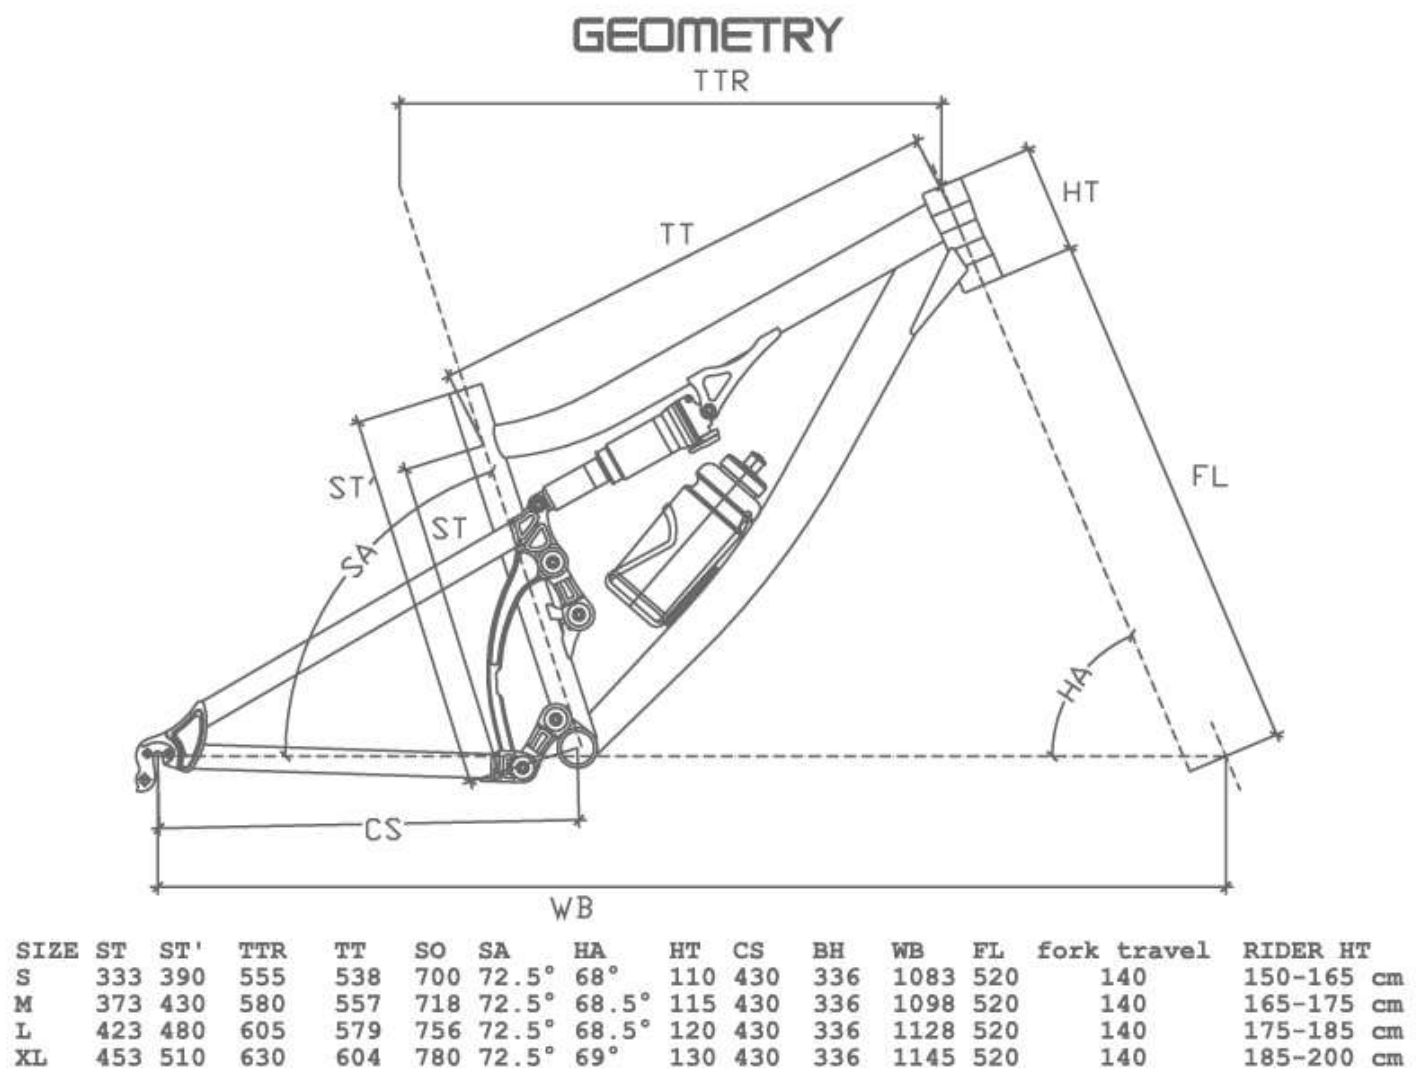

MDE CARVE AM (26) 2011 FRAME SPECS

- Max Fork travel: 140MM(26")
- Rear Shock Size: 200mm X 57mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:140mm
- Headset (Top): 34mm EXTERNAL CUP (1" 1/8)
- Headset (Bottom): 34mm EXTERNAL CUP (1" 1/8)
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm I.S
- Rear Dropouts: **135x10QR**
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : None
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double or 48-36-26 Triple
- Max Tire Size: 26"X 2.30


MDE BOLDER MX(26) 2011 GEOMETRY

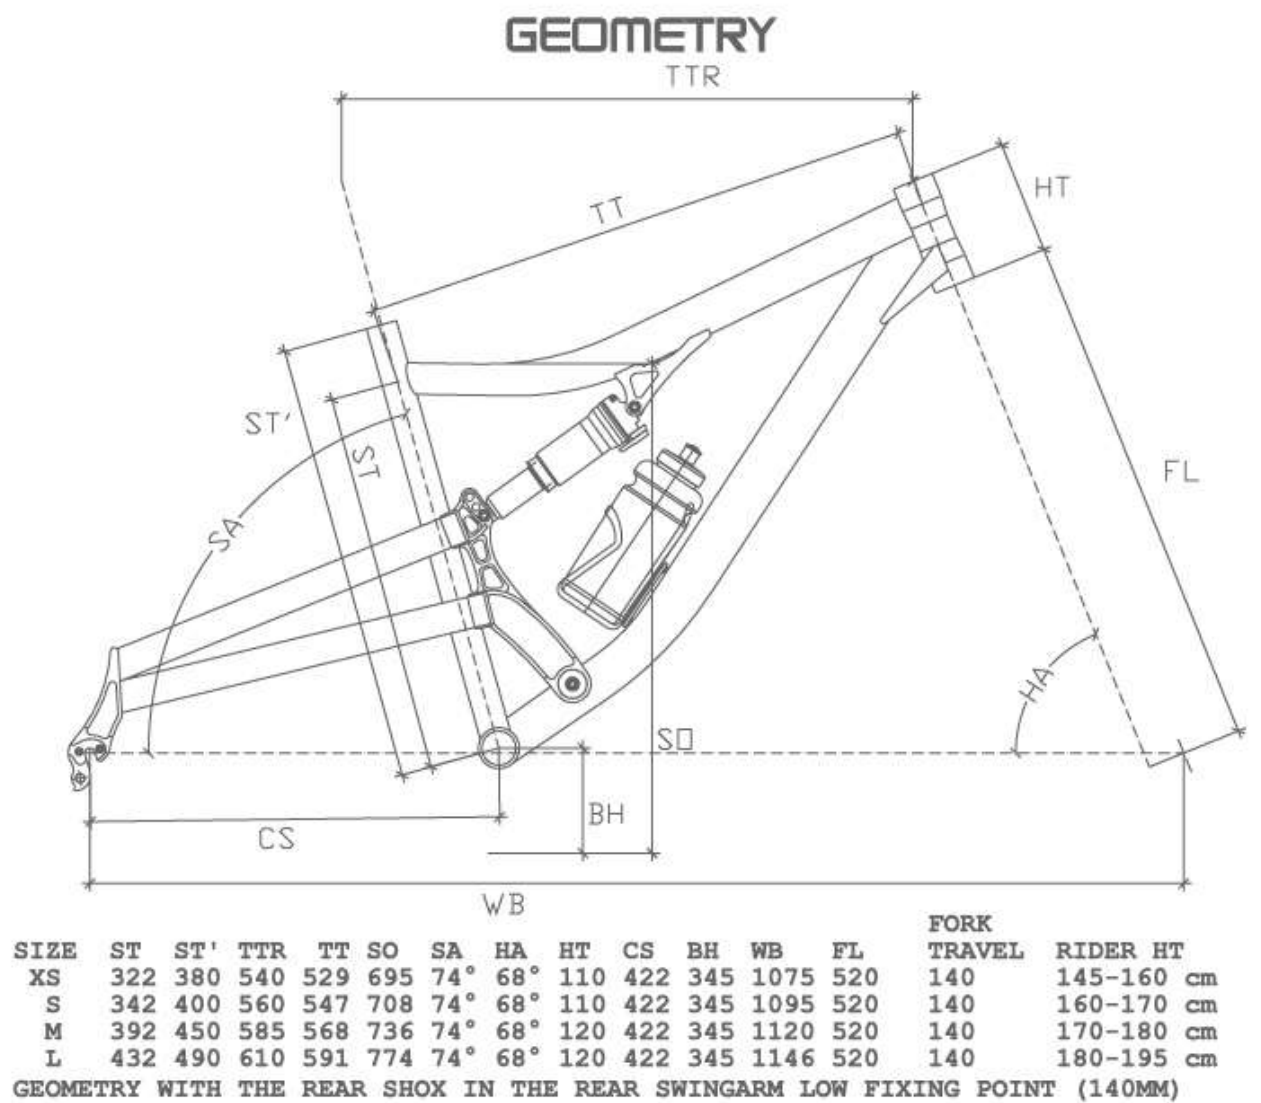

MDE BOLDER MX (26) 2011 FRAME SPECS

- Max Fork travel: 140MM(26")
- Rear Shock Size: 190mm X 51mm
- Shock Hardware: 50mm X 8mm rear, 22mm X 8mm front
- Rear travel:120mm-130mm-140mm
- Headset (Top): 34mm EXTERNAL CUP (1" 1/8)
- Headset (Bottom): 34mm EXTERNAL CUP (1" 1/8)
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm I.S
- Rear Dropouts: **135x10QR**
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : None
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double or 48-36-26 Triple
- Max Tire Size: 26"X 2.30

MDE CUDGEL I-LINK (26) 2011 GEOMETRY

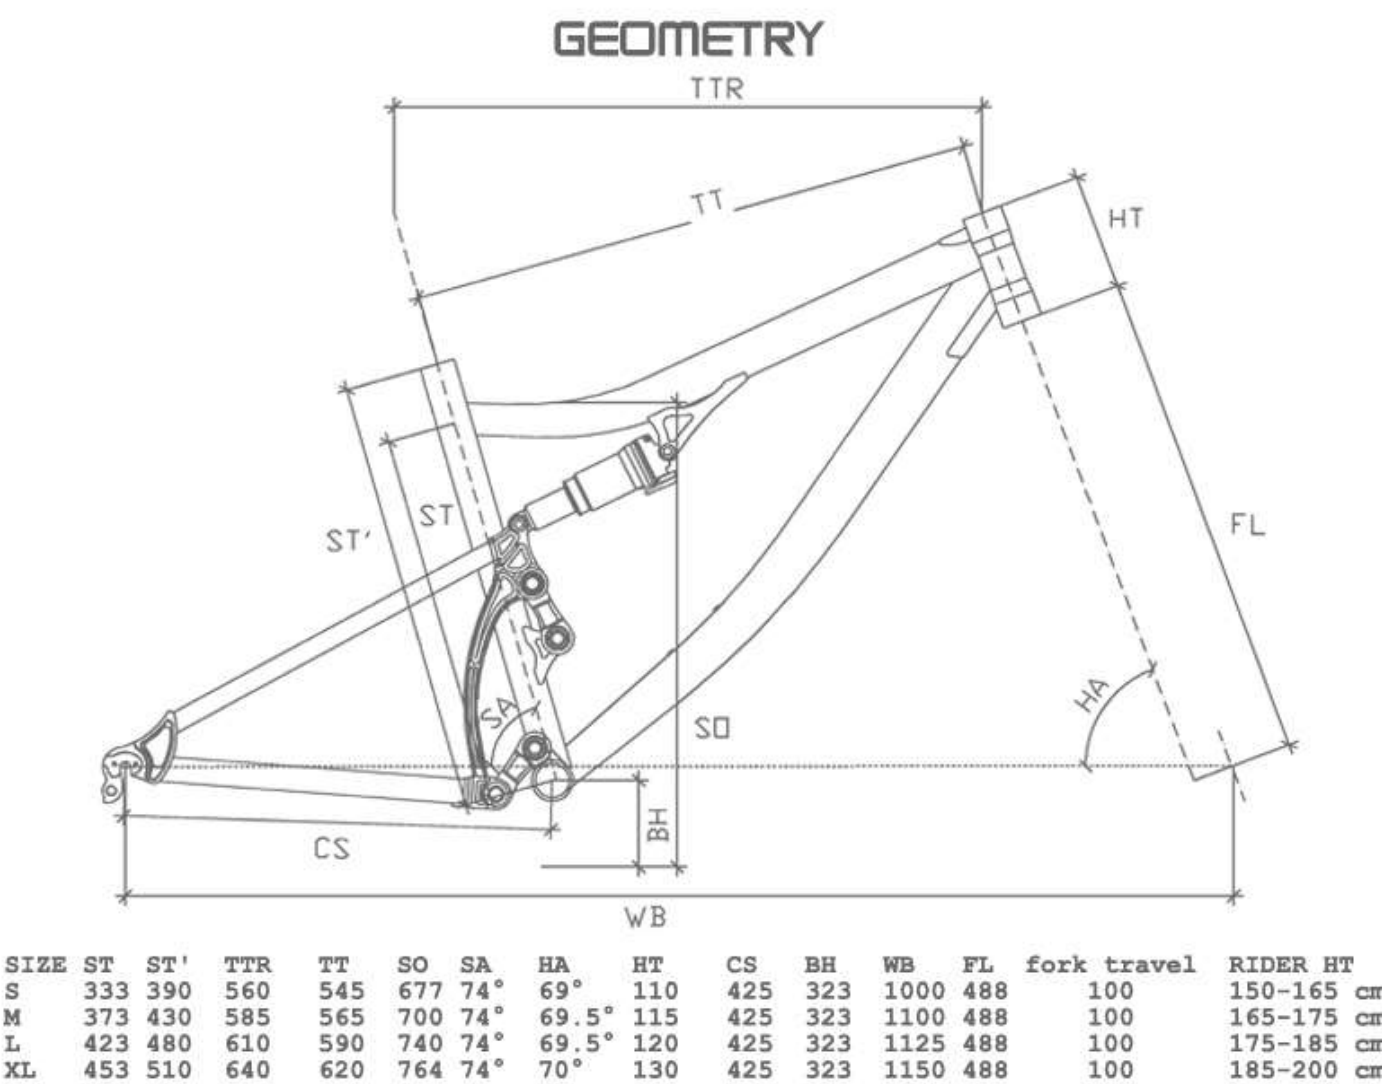


MDE CUDGEL I-LINK (26) 2011 FRAME SPECS

- Max Fork travel: 120MM(26")
- Rear Shock Size: 165mm X 38mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:100mm
- Headset (Top): 34mm EXTERNAL CUP (1" 1/8)
- Headset (Bottom): 34mm EXTERNAL CUP (1" 1/8)
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm I.S
- Rear Dropouts: **135x10QR**
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : None
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double or 48-36-26 Triple
- Max Tire Size: 26"X 2.30

MDE SLIDER 2011 GEOMETRY

GEOMETRY

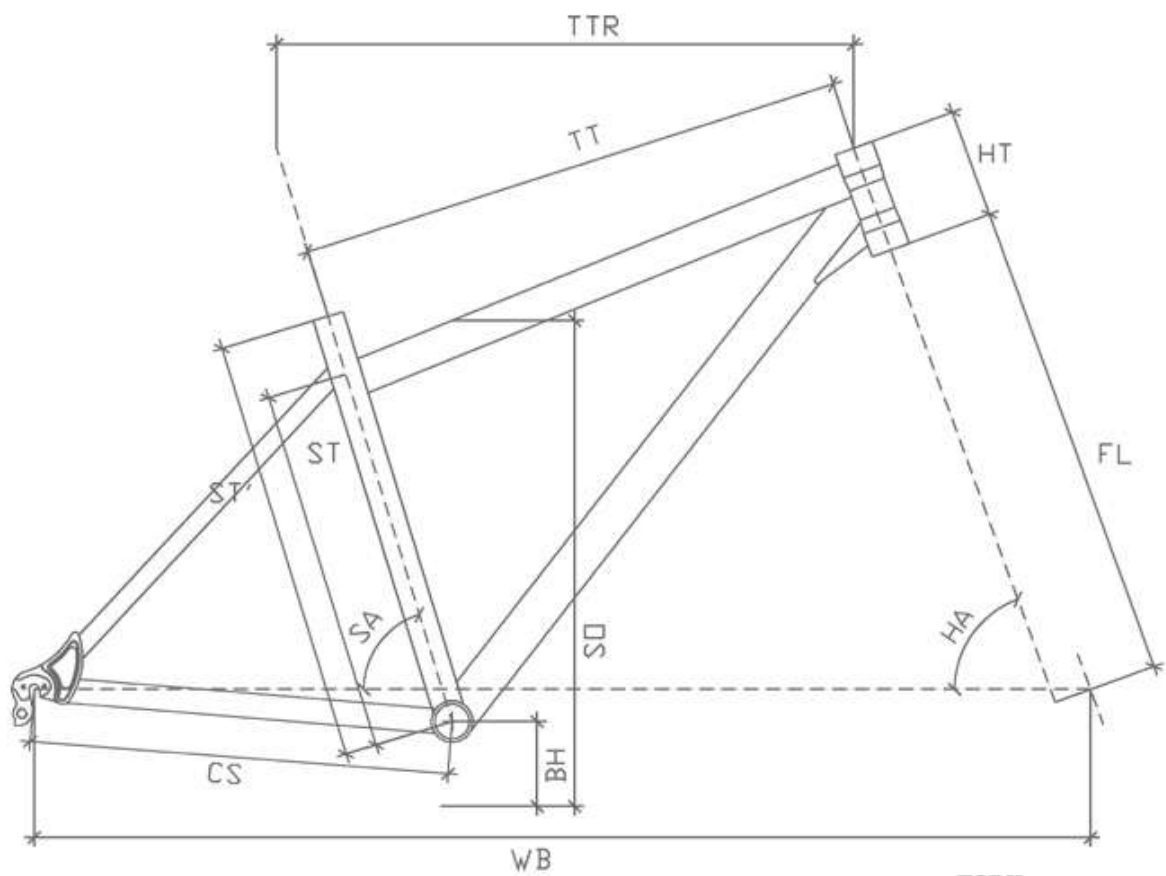

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	FORK TRAVEL	RIDER HT
13.5	276	340	535	533	628	73.5°	69.5°	90	425	302	1031	473	100	140-152 cm
15	316	380	555	542	665	73°	69.5°	100	425	302	1046	473	100	152-160 cm
16	346	410	570	551	692	73°	70°	107	425	302	1056	473	100	160-168 cm
17	366	430	585	563	709	73°	70°	110	425	302	1071	473	100	168-175 cm
18	386	450	600	575	730	73°	70°	115	425	302	1086	473	100	175-183 cm
19	416	480	615	590	755	73°	70°	120	425	302	1101	473	100	183-191 cm
20	446	510	630	605	780	73°	70°	125	425	302	1116	473	100	191-199 cm
21	476	540	645	616	805	72.5°	70.5°	130	425	302	1118	473	100	199-210 cm


CUSTOM MADE ARE AVAILABLE



MDE SLIDER 2011 FRAME SPECS

- Max Fork travel: 120MM(26")
- Headset (Top): 34mm EXTERNAL CUP (1" 1/8)
- Headset (Bottom): 34mm EXTERNAL CUP (1" 1/8)
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm I.S
- Rear Dropouts: **135x10QR**
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.31,8mm
- ISCG Tabs : None
- Seatpost Diameter: 27,2mm
- Seat Clamp: 31,8mm
- Max Chainring Size: 36t Single or 38-26 Double or 48-36-26 Triple
- Max Tire Size: 26"X 2.2


MDE SLIDER 29 2011 GEOMETRY

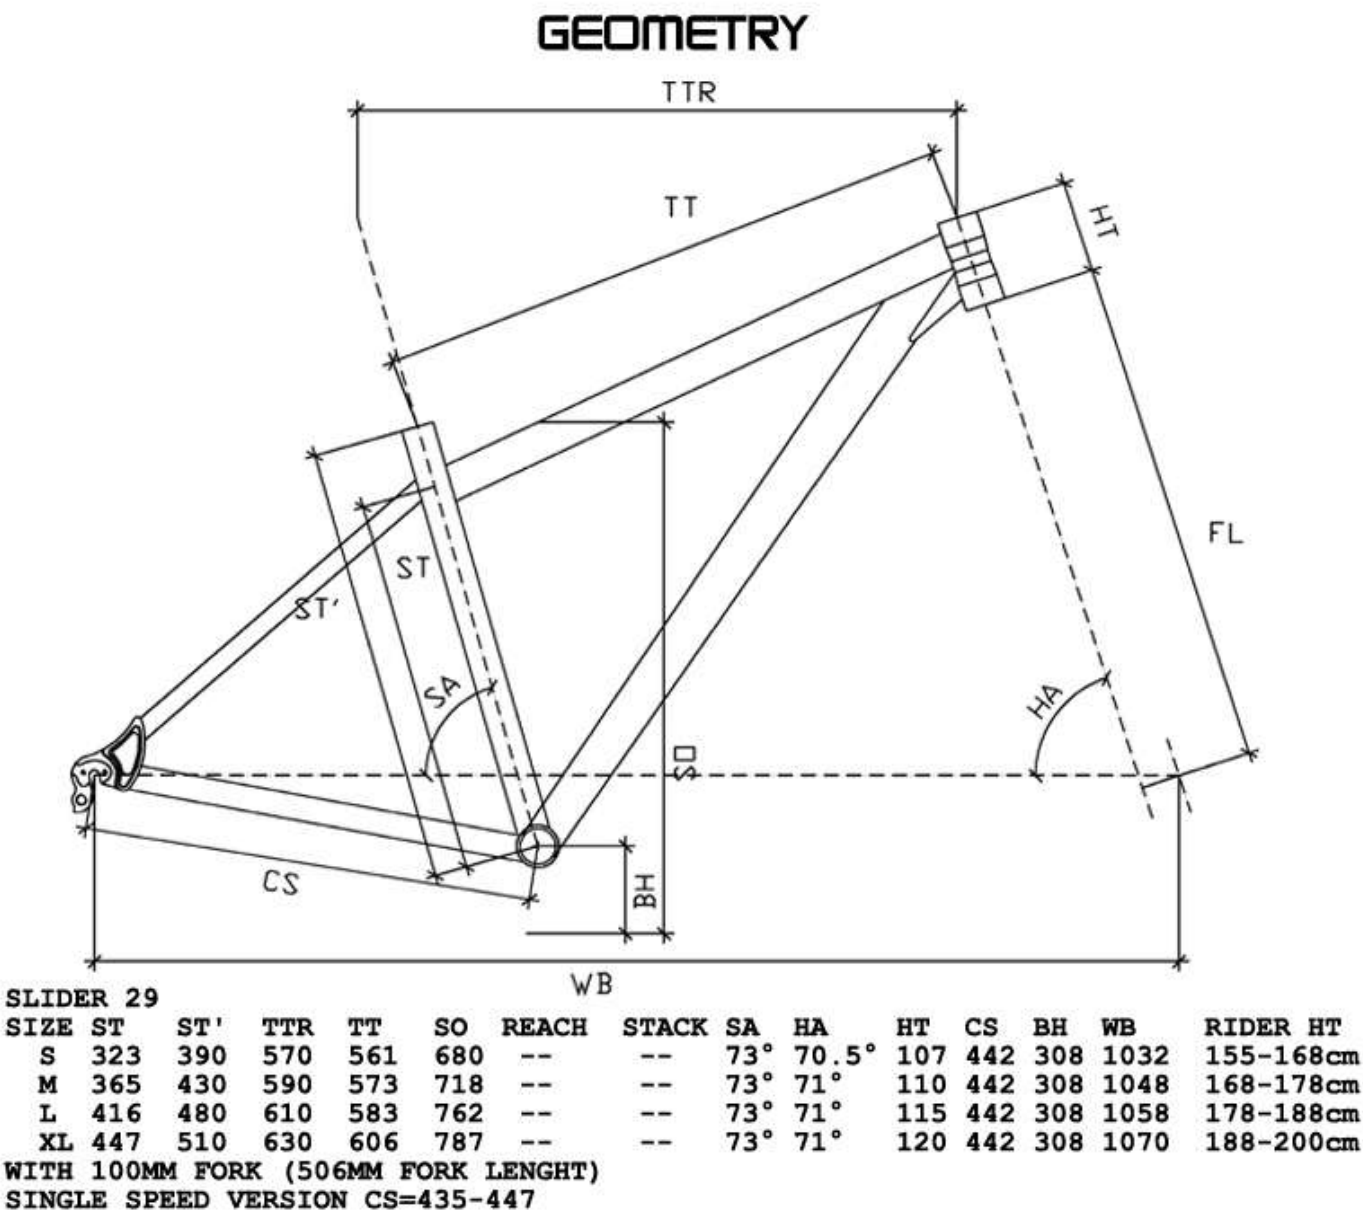

MDE SLIDER 29 2011 FRAME SPECS

- Max Fork travel: 120MM(29")
- Headset (Top): 34mm EXTERNAL CUP (1" 1/8)
- Headset (Bottom): 34mm EXTERNAL CUP (1" 1/8)
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm I.S
- Rear Dropouts: **135x10QR**
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.31,8mm
- ISCG Tabs : None
- Seatpost Diameter: 27,2mm
- Seat Clamp: 31,8mm
- Max Chainring Size: 36t Single or 38-26 Double or 48-36-26 Triple
- Max Tire Size: 29"X 2.2

MDE SLIDER CARBON (26) 2011 GEOMETRY

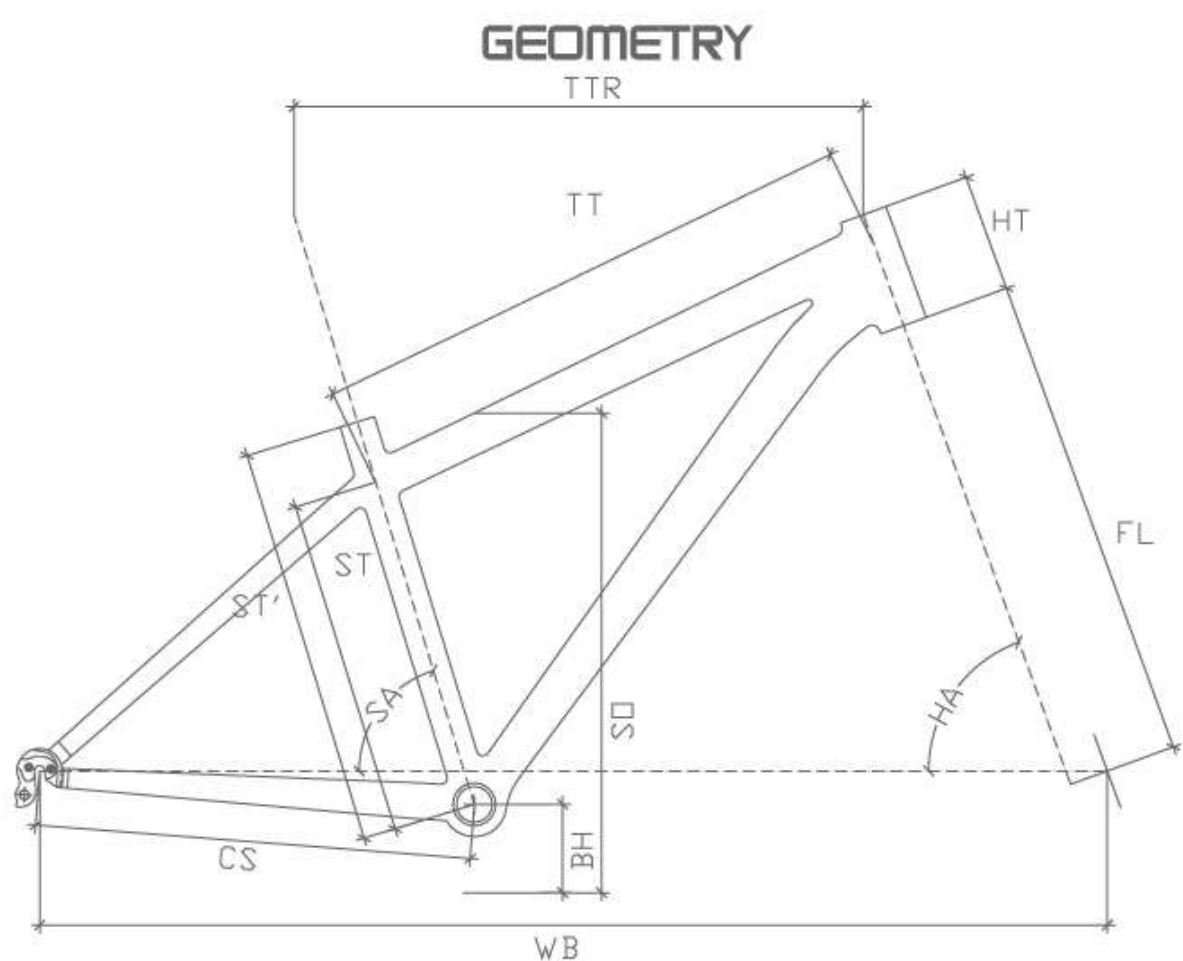

26" WHEELS GEOMETRY

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
15.5	316	360	555	538	73°	70°	115	424	300	1040	473	100	150-168 cm
17	366	430	585	563	73°	70°	120	424	300	1070	473	100	168-175 cm
18	386	450	600	576	73°	70°	125	424	300	1086	473	100	175-183 cm
19	416	480	615	590	73°	70°	130	424	300	1100	473	100	183-191 cm
20	446	510	630	605	73°	70.5°	135	424	300	1110	473	100	191-199 cm
21	476	540	645	622	73°	70.5°	145	424	300	1127	473	100	199-210 cm




MDE SLIDER CARBON (26) 2011 FRAME SPECS

- Max Fork travel: 120MM(26")
- Headset (Top): Integrated (1" 1/8)
- Headset (Bottom): Integrated (1" 1/8)
- BB Shell: 68mm BSA THREADED or BB30
- Rear Brake Mount: 160mm I.S
- Rear Dropouts: **135x10QR**
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : None
- Seatpost Diameter: 31,6mm
- Seat Clamp: 34,9mm
- Max Chainring Size: 36t Single or 38-26 Double or 48-36-26 Triple
- Max Tire Size: 26"X 2.2

MDE 4TRAIL 26 2011 GEOMETRY


GEOMETRY

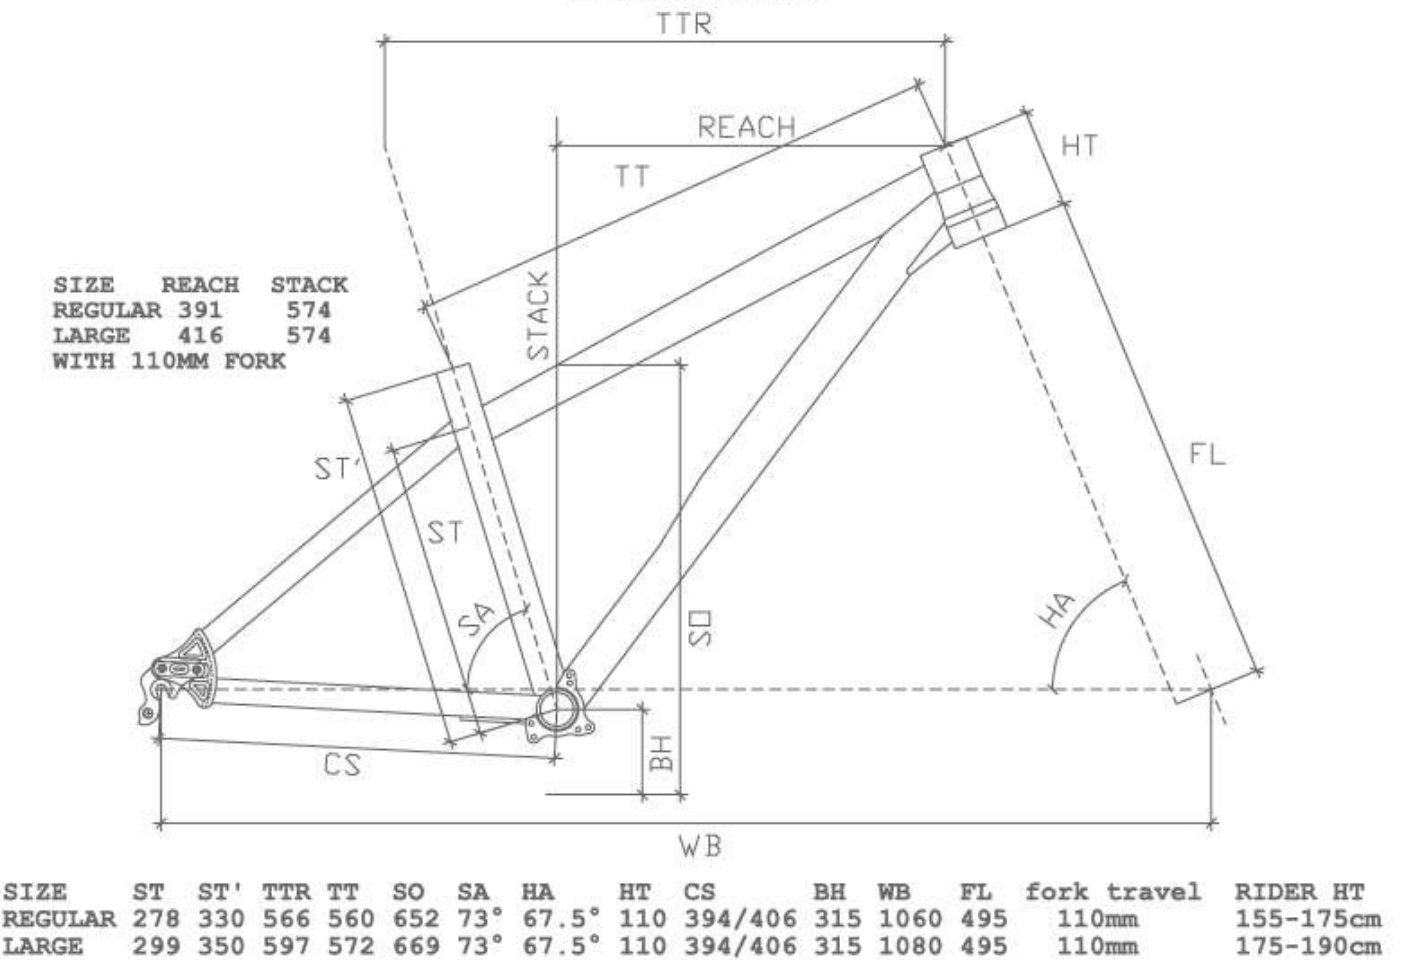

MDE 4TRAIL 26 2011 FRAME SPECS

- Max Fork travel: 150MM(26")
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm I.S. Or Post Mount
- Rear Dropouts:MDS system-**135x10QR**,142X12mm,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 34t Single or 36-24 Double
- Max Tire Size: 26"x2,5

MDE ANVIL STEEL 26 2011 GEOMETRY

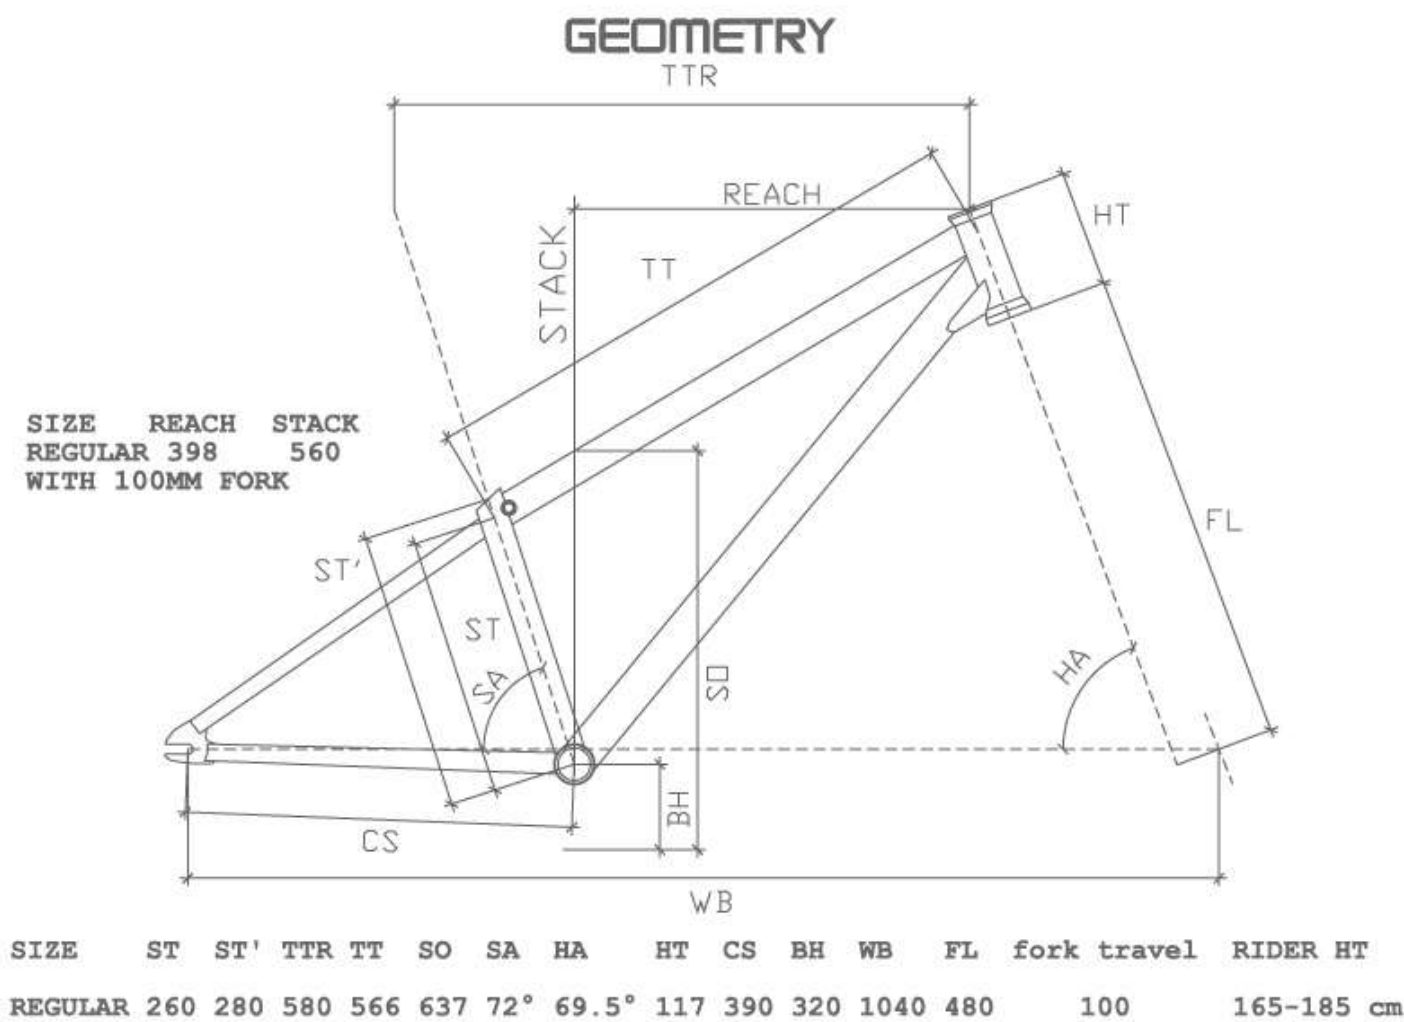

MDE ANVIL STEEL 26 2011 FRAME SPECS

- Max Fork travel: 110MM(26")
- Headset (Top): Integrated (1" 1/8)
- Headset (Bottom): Integrated (1" 1/8)
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm IS
- Rear Dropouts:**135x10QR**
- Front Derailleur: None
- ISCG Tabs : None
- Seatpost Diameter: 27,2mm
- Seat Clamp: Integrated
- Max Chainring Size: 34t Single
- Max Tire Size: 26"x2,5