


MDE 2013 FRAMES TECH INFO

MDE 69 DH 2013 GEOMETRY

tech area

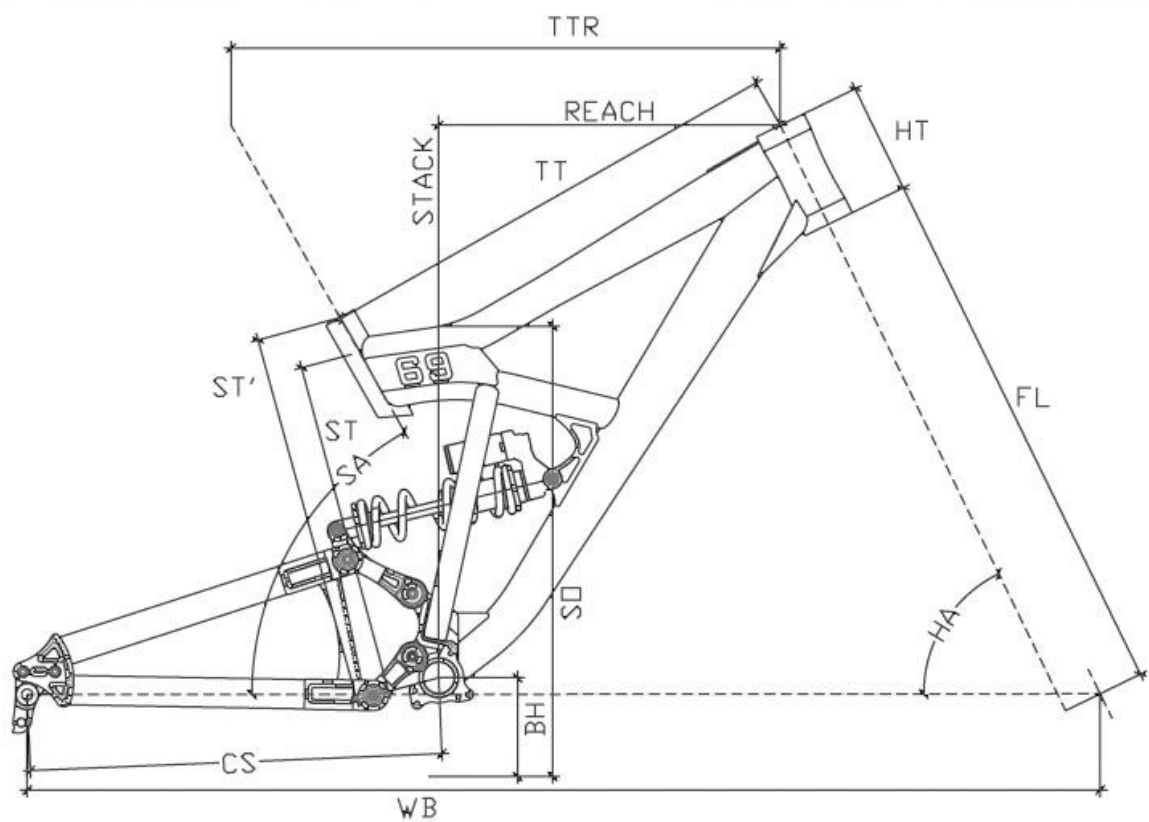

SIZE	ST	ST'	TTR	TT	SO	REACH	STACK	SA	HA	HT	CS	BH	WB	RIDER HT
S	361	407	574	498	746	348	599	60.5°	64°	120	444	358	1141	155-175cm
M	361	407	599	521	746	373	599	60.5°	64°	120	444	358	1166	175-185cm
L	361	407	624	544	746	403	599	60.5°	64°	120	444	358	1196	185-200cm

MDE 69 DH 2013 FRAME SPECS

Rear Shock Size: 241mm X 76mm

Shock Hardware: 22mm X 8mm rear, 22mm X 8mm front

Rear travel:210mm

Headset (Top): 49mm ZERO STACK (1,5")

Headset (Bottom): 49mm ZERO STACK (1,5")

BB Shell: 83mm BSA THREADED

Rear Brake Mount: 160mm POST MOUNT

Rear Axle: **150X12mm Thru**

Front Derailleur: NONE

ISCG Tabs : ISCG 03 and 05

Seatpost Diameter: 30mm


Seat Clamp: 34.9mm

Max Chainring Size: 42T SINGLE

Max Tire Size: 27.5"(650B)X 2.5

MDE DAMPER SX (26) 2013 GEOMETRY

tech area

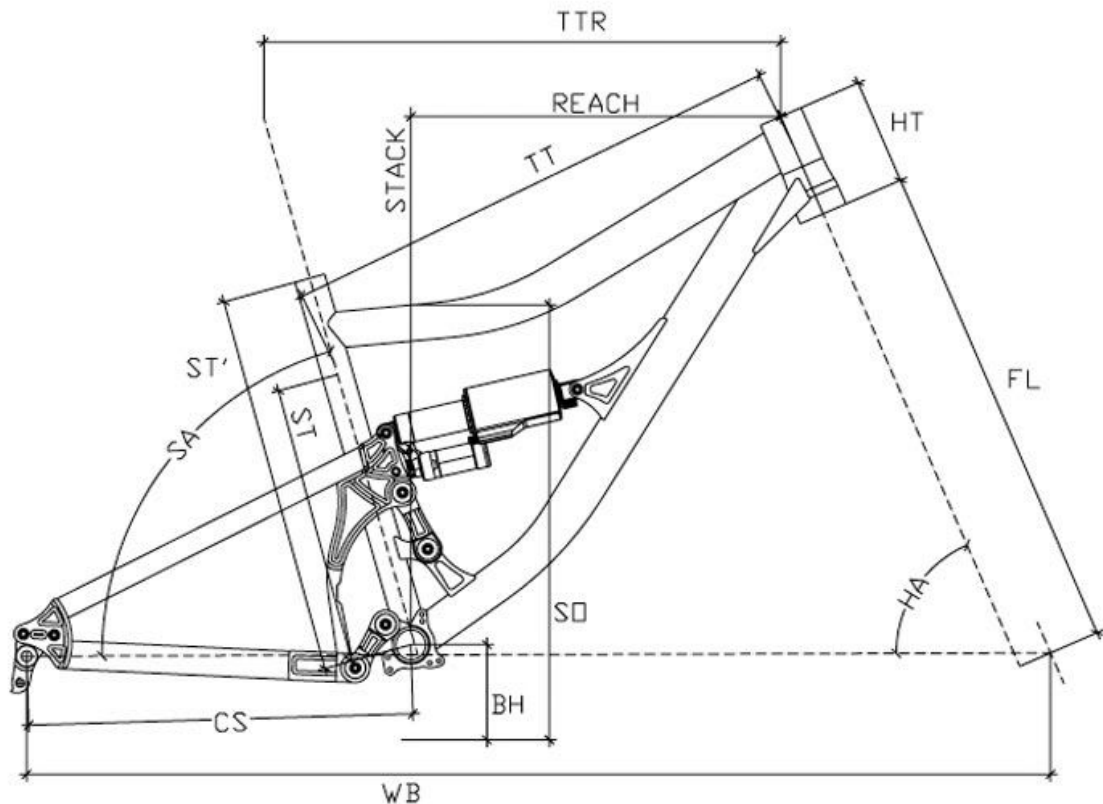


SIZE	ST	ST'	TTR	TT	SO	REACH	STACK	SA	HA	HT	CS	BH	WB	RIDER HT
S	323	390	556	540	701	394	580	72°	66°	107	435	353	1139	150-165cm
M	323	420	580	540	735	417	583	72°	66°	110	435	353	1164	165-175cm
L	370	450	600	557	758	436	587	72°	66°	115	435	353	1185	175-185cm
XL	400	480	620	577	783	455	592	72°	66°	120	435	353	1199	185-200cm

MDE DAMPER SX (26) 2013 FRAME SPECS

- Rear Shock Size: 216mm X 63mm or 222x70mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:160mm or 170mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 26"X 2.5

MDE CARVE 6 (26) 2013 GEOMETRY

tech area

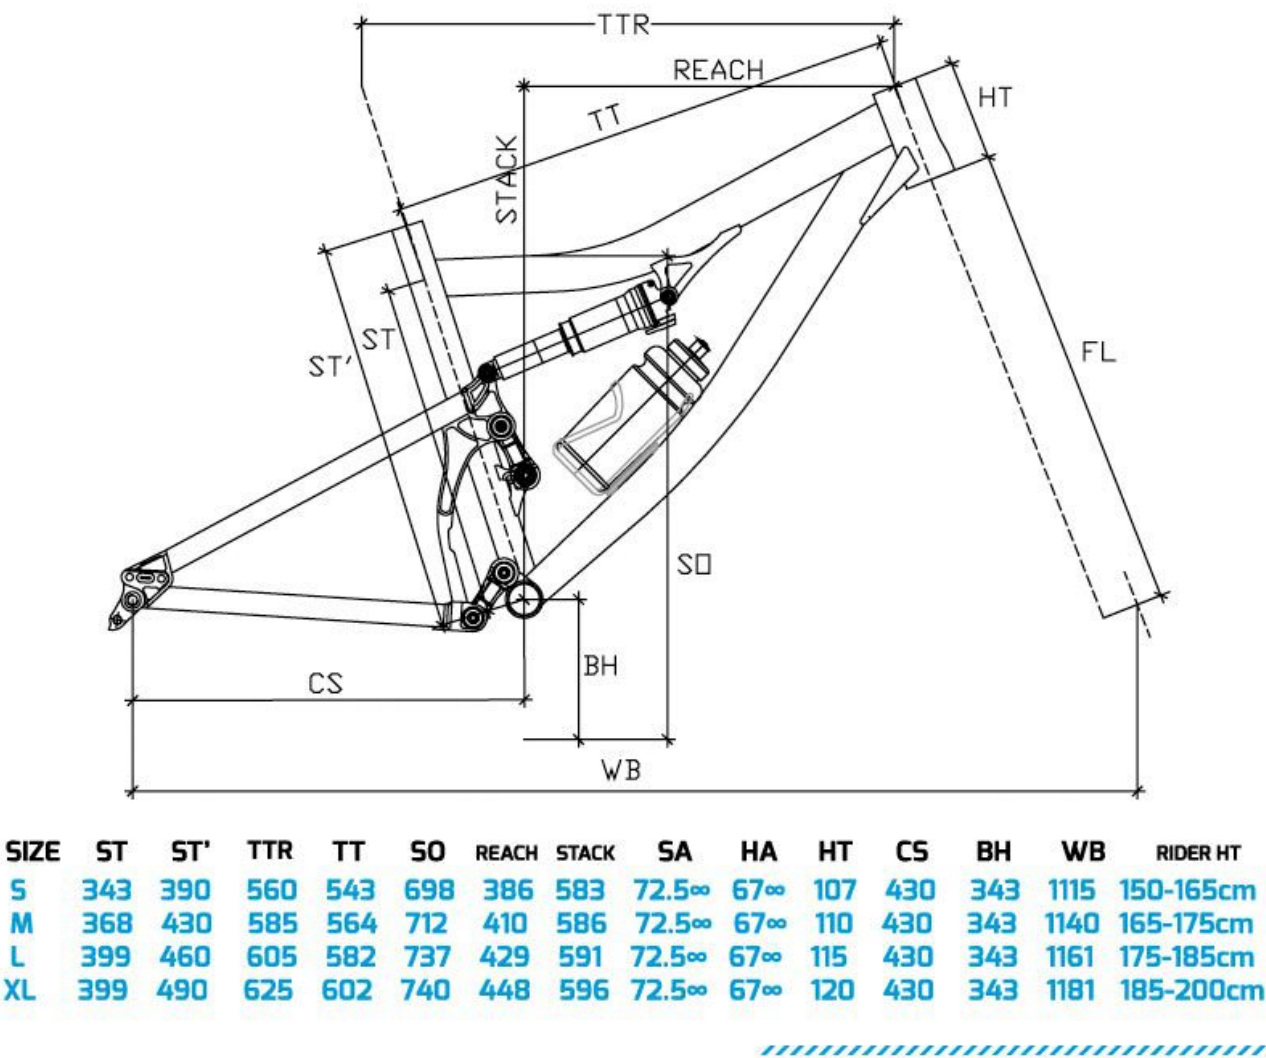


MDE CARVE 6 (26) 2013 FRAME SPECS

- Rear Shock Size: 200mm X 57mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:150mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 26”(650B)X 2.5

MDE CARVE 7 (650B) 2013 GEOMETRY

tech area

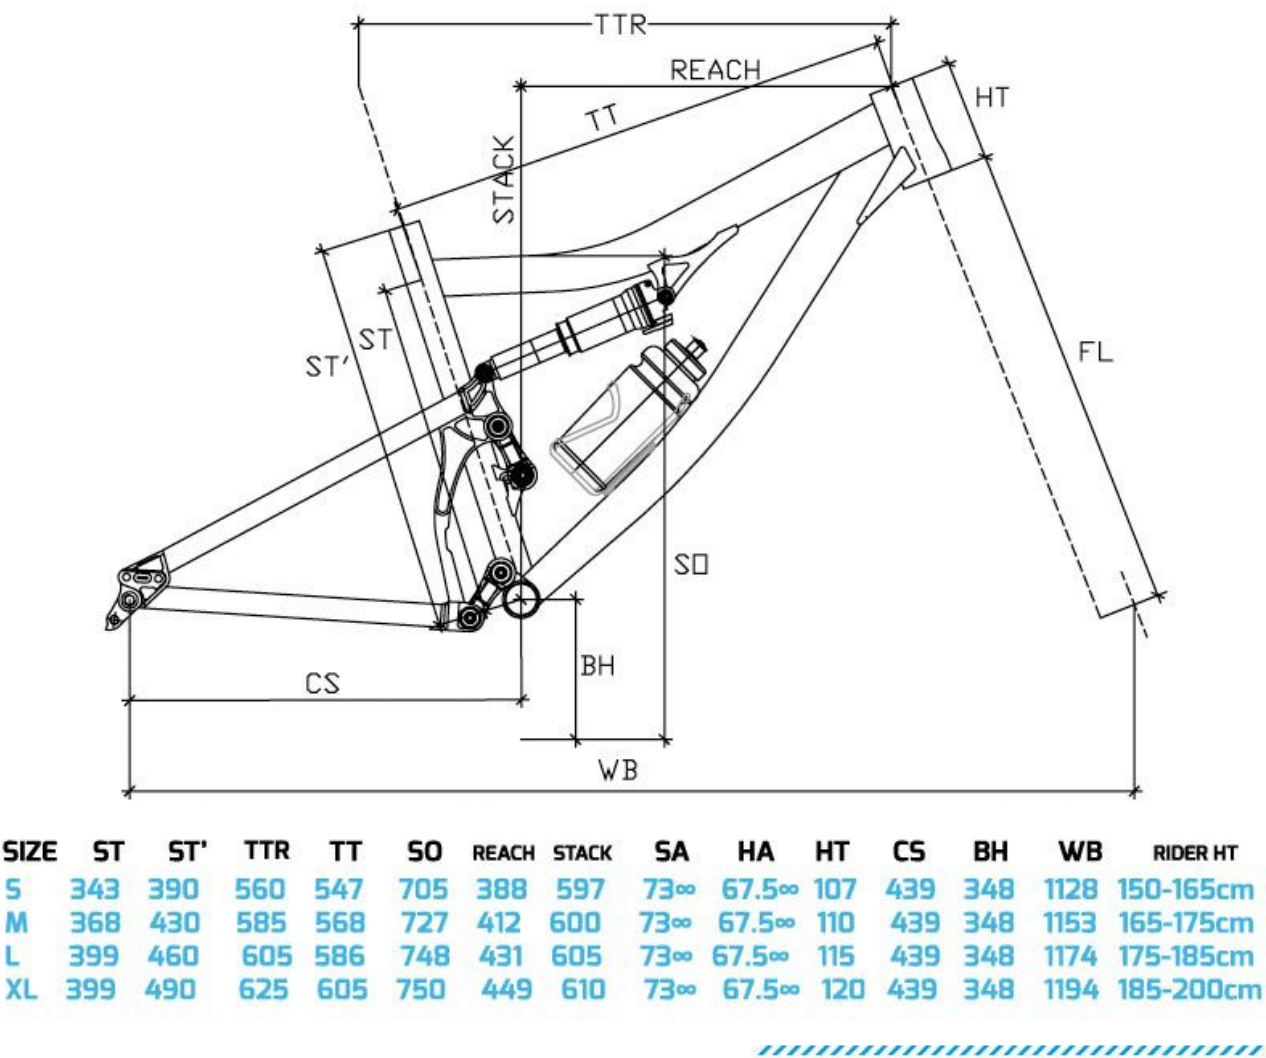


MDE CARVE 7 (650B) 2013 FRAME SPECS

- Rear Shock Size: 200mm X 57mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:150mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 27,5”(650B)X 2.5

MDE CARVE 9 (29) 2013 GEOMETRY

tech area

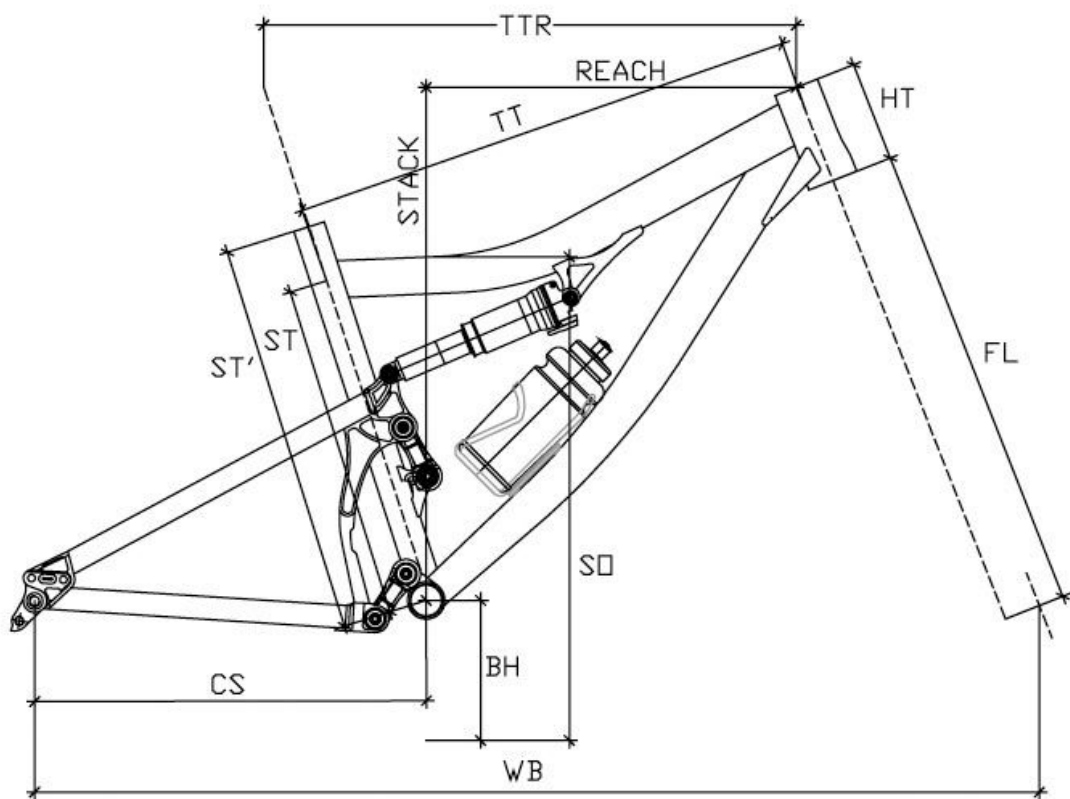


SIZE	ST	ST'	TTR	TT	SO	REACH	STACK	SA	HA	HT	CS	BH	WB	RIDER HT
S	343	390	560	552	699	401	622	74.5°	70°	107	455	341	1113	150-165cm
M	368	430	585	573	723	425	625	74.5°	70°	110	455	341	1138	165-175cm
L	399	460	605	591	744	444	630	74.5°	70°	115	455	341	1159	175-185cm
XL	399	490	625	610	746	462	635	74.5°	70°	120	455	341	1179	185-200cm

MDE CARVE 9 (29) 2013 FRAME SPECS

- Rear Shock Size: 190mm X 51mm
- Shock Hardware: 40mm X 8mm rear, 22mm X 8mm front
- Rear travel:127mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 29"X 2.3

MDE BOLDER 6 (26) 2013 GEOMETRY

tech area

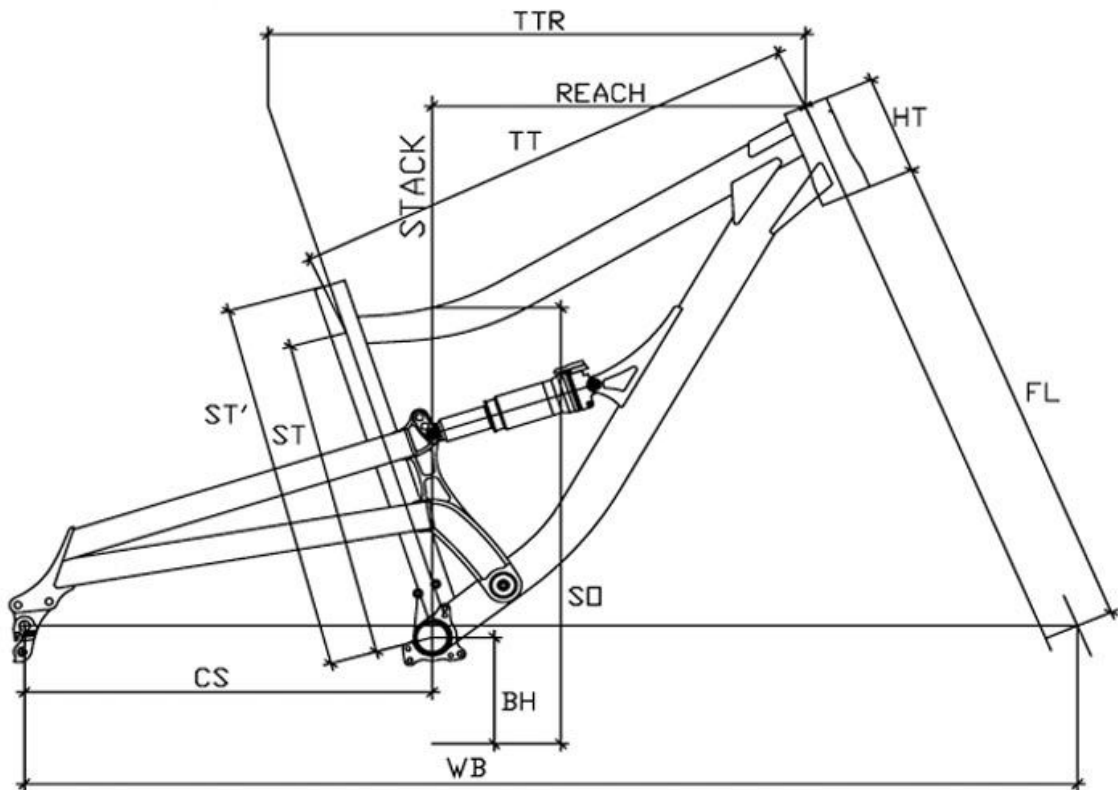


SIZE	ST	ST'	TTR	TT	SO	REACH	STACK	SA	HA	HT	CS	BH	WB	RIDER HT
S	352	400	560	537	730	395	626	72°	66°	110	425	350	1123	160-170cm
M	367	430	590	565	735	423	575	72°	66°	115	425	350	1153	170-183cm
L	427	490	620	595	780	452	585	72°	66°	120	425	350	1183	183-200cm

MDE BOLDER 6 (26) 2013 FRAME SPECS

- Rear Shock Size: 190mm X 51mm
- Shock Hardware: 50mm X 8mm rear, 22mm X 8mm front
- Rear travel:130-140-150mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Down pull-Top swing (tiraggio basso-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 26”(650B)X 2.5

MDE BOLDER 7 (650B) 2013 GEOMETRY

tech area

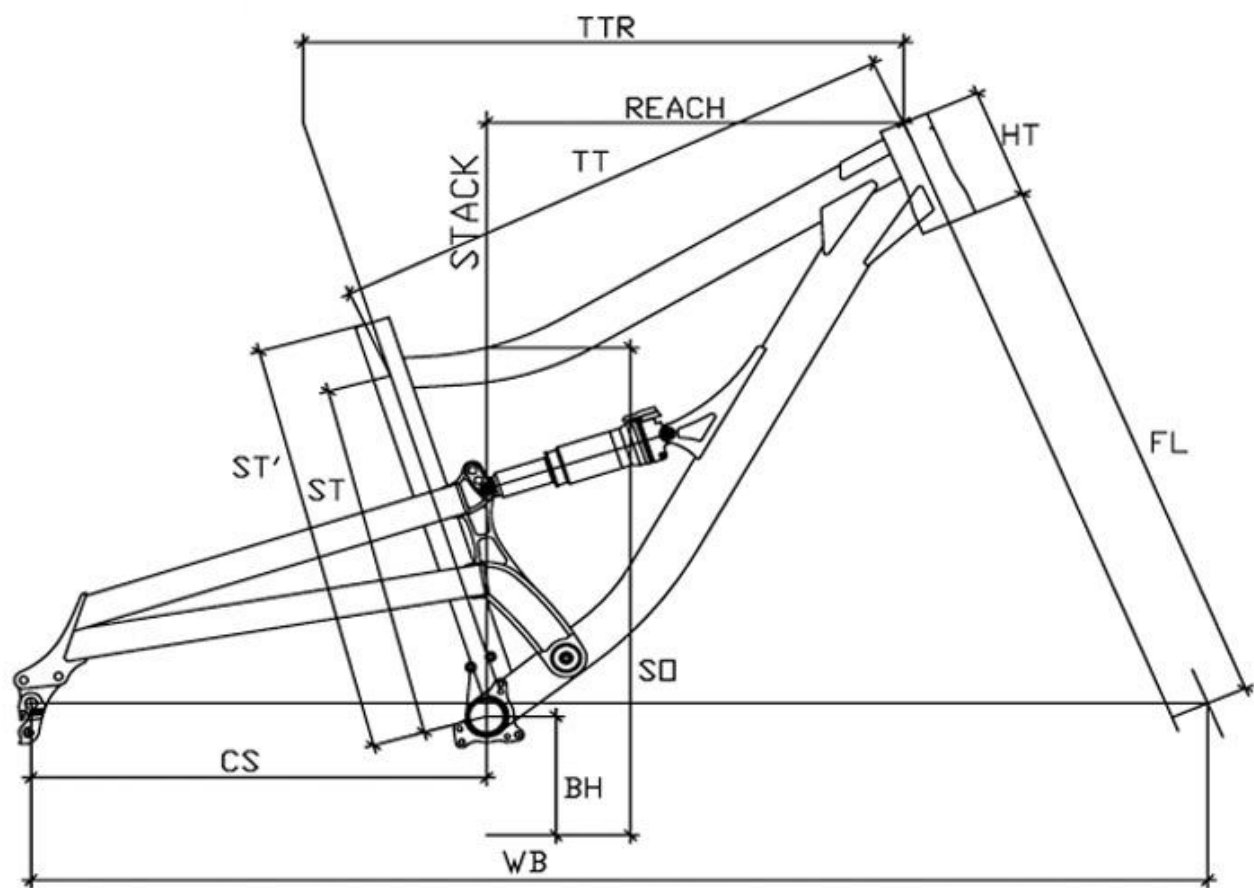


SIZE	ST	ST'	TTR	TT	SO	REACH	STACK	SA	HA	HT	CS	BH	WB	RIDER HT
S	352	400	560	541	737	402	670	73∞	67∞	110	429	353	1123	160-170cm
M	367	430	590	569	759	437	678	73∞	67∞	115	429	353	1153	170-183cm
L	427	490	620	600	799	473	686	73∞	67∞	120	429	353	1183	183-200cm

MDE BOLDER 7 (650B) 2013 FRAME SPECS

- Rear Shock Size: 190mm X 51mm
- Shock Hardware: 50mm X 8mm rear, 22mm X 8mm front
- Rear travel:130-140-150mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Down pull-Top swing (tiraggio basso-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 27,5”(650B)X 2.5

MDE BOLDER 9 (29) 2013 GEOMETRY

tech area

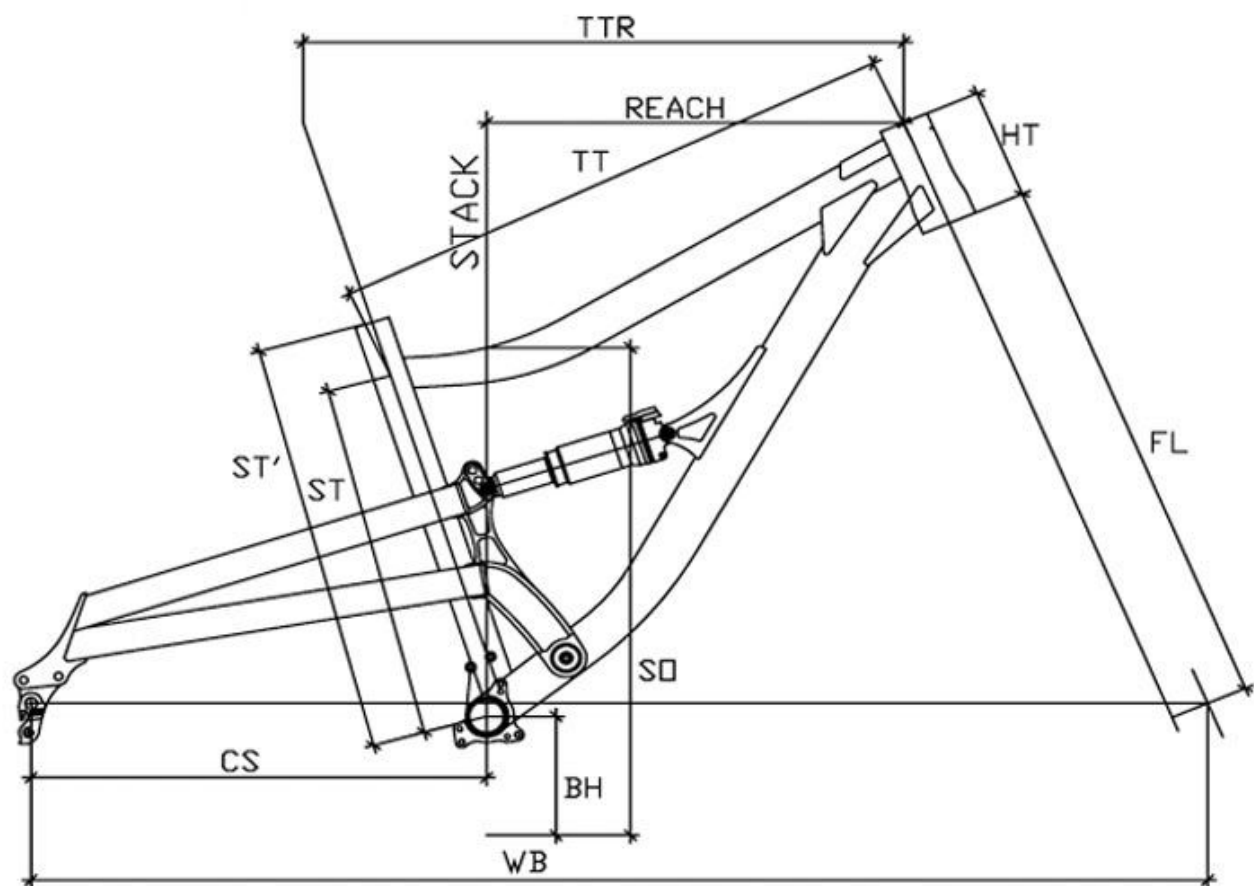


SIZE	ST	ST'	TTR	TT	SO	REACH	STACK	SA	HA	HT	CS	BH	WB	RIDER HT
S	352	400	560	552	730	396	622	72.5°	68.5°	110	445	356	1126	160-170cm
M	367	430	590	572	763	427	624	72.5°	68.5°	115	445	356	1156	170-183cm
L	427	490	627	604	799	463	626	72.5°	68.5°	120	445	356	1193	183-200cm

MDE BOLDER 9 (29) 2013 FRAME SPECS

- Rear Shock Size: 190mm X 51mm
- Shock Hardware: 50mm X 8mm rear, 22mm X 8mm front
- Rear travel:120-130-140mm
- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm,150x12mm (SRAM MAXLE STD)
- Front Derailleur: Down pull-Top swing (tiraggio basso-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 29"X 2.3

MDE SLIDER 29 2013 GEOMETRY

tech area

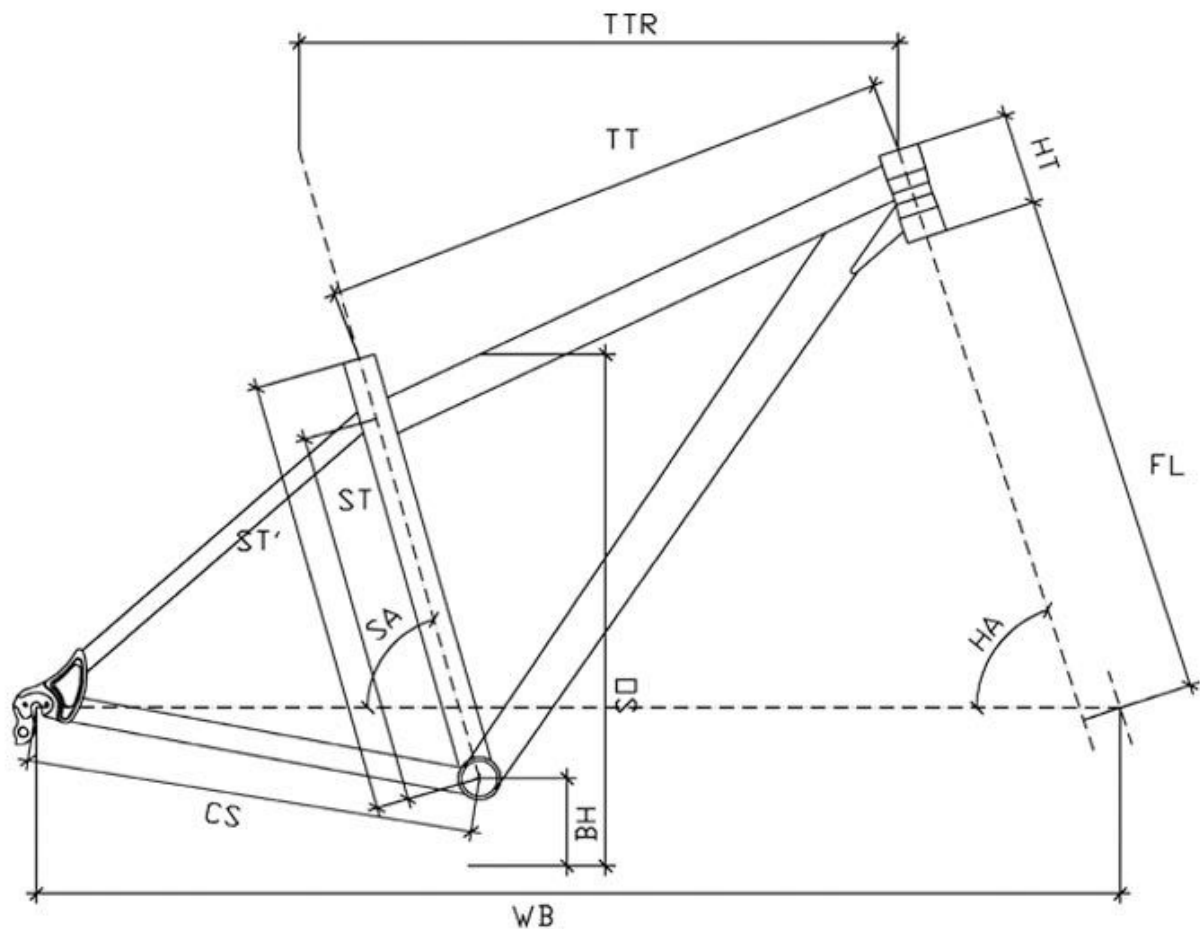


SIZE	ST	ST'	TTR	TT	SO	REACH	STACK	SA	HA	HT	CS	BH	WB	RIDER HT
S	323	390	570	561	680	373	641	73°	70.5°	107	430-440	305	1032	155-168cm
M	365	430	590	573	718	392	644	73°	71°	110	430-440	305	1048	168-178cm
L	416	480	610	583	762	411	648	73°	71°	115	430-440	305	1058	178-188cm
XL	447	510	630	606	787	439	653	73°	71°	120	430-440	305	1070	188-200cm

MDE SLIDER 29 2013 FRAME SPECS

- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : None
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 36t Single or 38-26 Double
- Max Tire Size: 29"X 2.3

MDE 4TRAIL 26/650B 2013 GEOMETRY

tech area

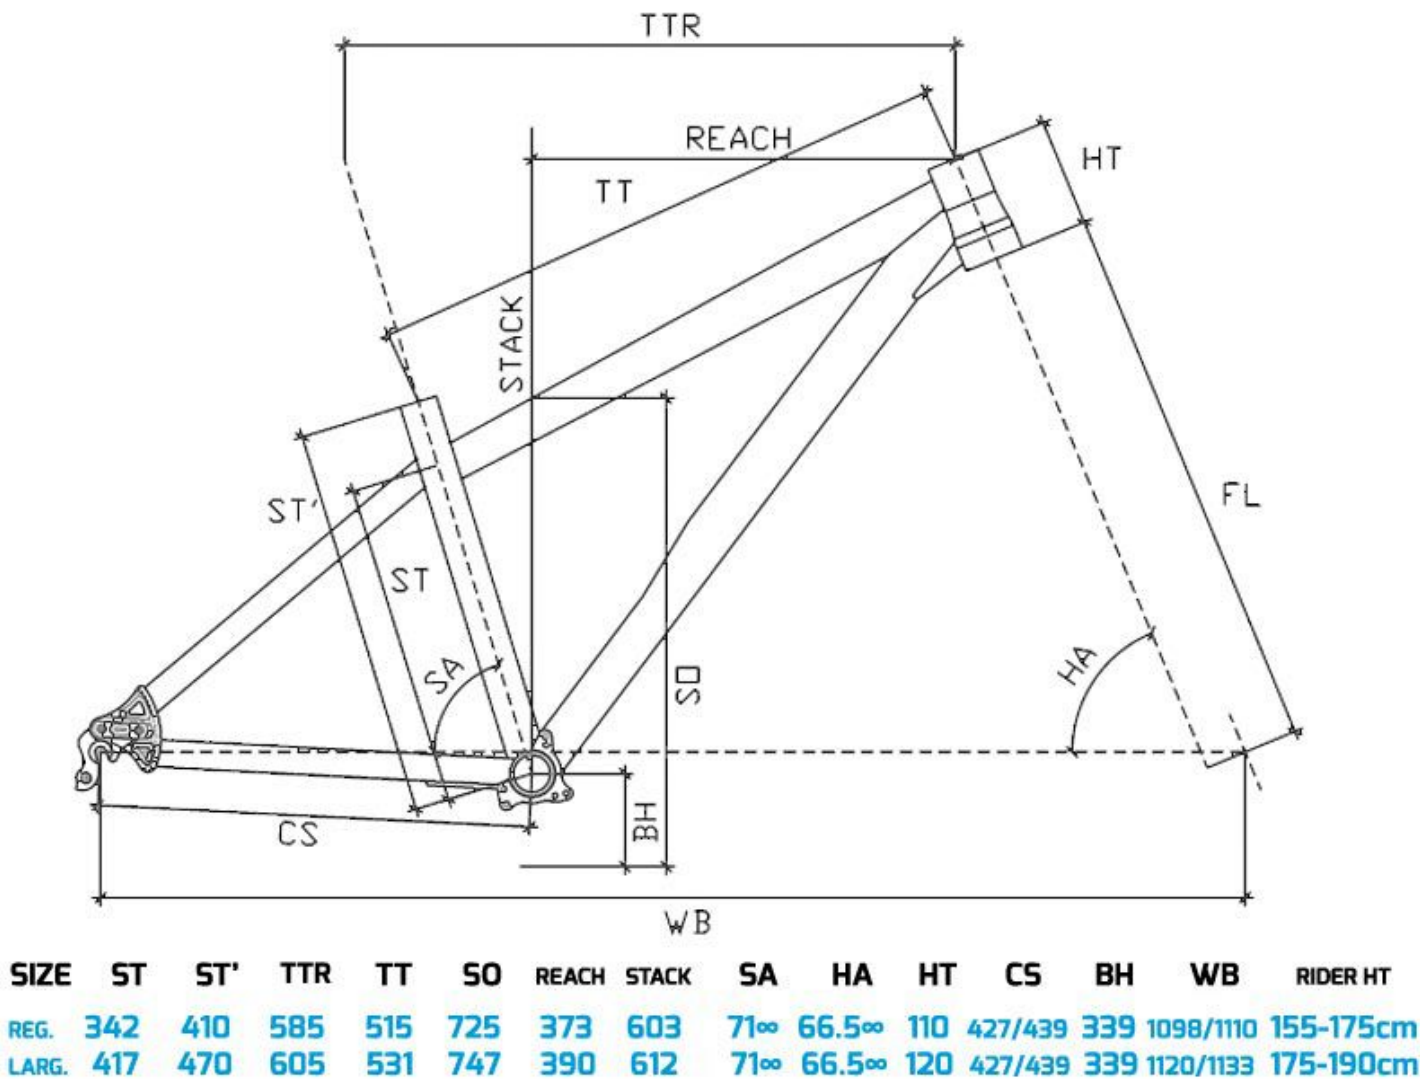

MDE SLIDER 29 2013 FRAME SPECS

- Headset (Top): 44mm ZERO STACK
- Headset (Bottom): 49mm EXTERNAL CUP
- BB Shell: 73mm BSA THREADED
- Rear Brake Mount: 160mm POST MOUNT
- Rear Axle:MDS system-135x10QR,**142X12mm**,148x12mm, 150x12mm (SRAM MAXLE STD)
- Front Derailleur: Top pull-Top swing (tiraggio alto-fascetta bassa), D.34,9mm
- ISCG Tabs : ISCG 03 and 05
- Seatpost Diameter: 30.9mm
- Seat Clamp: 34.9mm
- Max Chainring Size: 34t Single or 36-24 Double
- Max Tire Size: 27,5"(650B)X 2.5