



MDEBIKES



2010 TECH CATALOGUE



69 DH 2010

TYPE: RACING DOWNHILL

TUBESET: ALU EASTON 7005 FS RAD WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: MDE OWNER DH-LINK SYSTEM, ERGAL PIVOT AND SPECIAL "ENDURO BEARINGS"

REAR SHOCK (STANDARD): ROCK SHOX VIVID 5.1 241X76 C TUNE

WHEEL TRAVEL: 210MM

DROPOUTS: CNC REPLACEABLE, SIX DIFFERENT VERSION ARE AVAILABLE (MDE DROPOUTS SYSTEM)

WEIGHT: 4.35 KG (M SIZE, ANNOXIDIZED WITH FOX DHX 5.0)

SIZE: S, M, L

STANDARD COLORS (POWER COATING): RAW, ROYAL BLUE, ROYAL RED, PURE WHITE

(FOR STANDARD COLORS LINKS AND DROPOUTS ARE BLACK ANODIZED)

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

TECHNICAL INFORMATIONS:

Seat post diameter = 30mm

Seat collar diameter = 34.9 mm

Headset diameter = 1.5"

Headset type = normal

Fork type = 180 TO 200mm

Brake type = disc only

Front derailleur diameter = --

Front derailleur cable route = --

Front derailleur type = --

Bottom bracket shell width = 83 mm

Freehub width = 135 mm or 150mm

(MDE Dropouts system)

Shock length = 240mm

Shock travel = 76

Shock pivot width front = 22mm

Shock pivot width rear = 22mm

Shock bolt diameter = 8mm

Rear wheel travel = 210mm

Tire maximum clearance = 26 x 3.0

Rear derailleur hanger type = MDE

Dropouts system

Weight = 4.20 Kg

FOR GEOMETRY SEE ALSO THE MANUAL

MDE DROPOUTS SYSTEM AVAILABLE:

1° 135X10MM VERTICAL I.S. DISC MOUNTING

2° 135X12MM VERTICAL I.S. DISC MOUNTING

3° 135X12MM TRUE AXLE FRONT POST MOUNT DISC

4° 150X12MM TRUE AXLE FRONT POST MOUNT DISC

5° 135X12MM MAXLE FRONT POST MOUNT DISC

6° 150X12MM MAXLE FRONT POST MOUNT DISC

AVAILABLE SHOX:

FOX DHX 5.0 COIL

FOX DHX 5.0 AIR

MARZOCCHI ROCO RC WC

MARZOCCHI ROCO RC WC AIR

ROCK SHOX MONARCH

ROCK SHOX VIVID




STANDARD COLORS

RAW

ROYAL BLUE

ROYAL RED

PURE WHITE



geometry

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S	361	407	570	497	750	61°	64.5°	120	447	367	1142	590	200	155-175 cm
M	361	407	590	514	750	61°	64.5°	120	447	367	1161	590	200	175-185 cm
L	361	407	610	536	750	61°	64.5°	120	447	367	1184	590	200	185-200 cm



PUSHER 2010

TYPE:FRERIDE OR LIGHT DOWNHILL

TUBESET:ALU EASTON 7005 FS RAD WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE:TIG WELDING AND CNC PARTS

SYSTEM:MDE OWNER I-LINK SYSTEM, ERGAL PIVOT AND SPECIAL "ENDURO BEARINGS"

REAR SHOCK: ROCK SHOX VIVID 5.1 222X70 B TUNE

WHEEL TRAVEL:188MM OR 165MM

DROPOUTS: CNC REPLACEABLE, SIX DIFFERENT VERSION ARE AVAILABLE (MDE DROPOUTS SYSTEM)

WEIGHT:3.95 KG ("S" SIZE, ANODIZED WITH FOX DHX 5.0 AIR)

SIZE:S, M, L

STANDARD COLOURS (POWDER COATING):Fluo yellow, Raw, Royal Red, Pure White
(FOR STANDARD COLORS LINKS AND DROPOUTS ARE BLACK ANODIZED)

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8 or 1.5"

Headset type = normal

Fork type = 160 TO 200mm

Brake type = disc only

Front derailleur diameter = 31.8 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

(can use only Shimano top swing)

Bottom bracket shell width = 83 mm

Freehub width = 135 mm or 150mm

(MDE Dropouts system)

Shock length = 220mm or 216mm

Shock travel = 70mm or 63.3mm

Shock pivot width front = 22mm

Shock pivot width rear = 40mm

Shock bolt diameter = 8mm

Rear wheel travel = 188mm (with 220mm shox)

or 165mm (with 216mm shox)

Tire maximum clearance = 26 x 2.7, 24x3.0

Rear derailleur hanger type = MDE

Dropouts system

Weight = 3.95 Kg

FOR GEOMETRY SEE ALSO THE MANUAL

MDE DROPOUTS SYSTEM AVAILABLE:

1° 135X10MM VERTICAL I.S. DISC MOUNTING

2° 135X12MM VERTICAL I.S. DISC MOUNTING

3° 135X12MM TRUE AXLE FRONT POST MOUNT DISC

4° 150X12MM TRUE AXLE FRONT POST MOUNT DISC

5° 135X12MM MAXLE FRONT POST MOUNT DISC

6° 150X12MM MAXLE FRONT POST MOUNT DISC

"S" SIZE WITH STRAIGHT TOP TUBE

ALSO AVAILABLE
WITH
1.5" STERLING TUBE

STANDARD COLORS

FLUO YELLOW

RAW

ROYAL RED

PURE WHITE

AVAILABLE SHOX:

FOX DHX 5.0 COIL

FOX DHX 5.0 AIR

MARZOCCHI ROCO RC WC

MARZOCCHI ROCO TST R

MARZOCCHI ROCO RC WC AIR

MARZOCCHI ROCO TST R AIR

ROCK SHOX MONARCH

ROCK SHOX VIVID



gEOMETRy.

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S	322	390	560	541	750	72°	66°	120	442	370	1116	579	180	155-170 cm
M	368	430	590	564	750	72°	66°	120	442	370	1135	579	180	170-185 cm
L	399	460	610	580	750	72°	66°	120	442	370	1170	579	180	185-200 cm



PLAYER 2010

TYPE:SLOPE STYLE TRAIL

TUBESET:MDE ALUMINIUM 7005 WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE:TIG WELDING AND CNC PARTS

SYSTEM:MDE OWNER I-LINK SYSTEM, 2010 NEW ERGAL PIVOT AND SPECIAL "ENDURO BEARINGS"

REAR SHOCK: ROCK SHOX MONARCH 4.2 B TUNE

WHEEL TRAVEL:140MM OR 110MM

DROPOUTS: CNC REPLACEABLE, SIX DIFFERENT VERSION ARE AVAILABLE (MDE DROPOUTS SYSTEM)

WEIGHT:3.95 KG ("S" SIZE, ANODIZED WITH FOX DHX 5.0 AIR)

SIZE:S, M, L

STANDARD COLOURS (POWDER COATING):Fluo yellow, Raw, Royal Red, Pure White
(FOR STANDARD COLORS LINKS AND DROPOUTS ARE BLACK ANODIZED)

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 100 TO 160mm

Brake type = disc only

Front derailleur diameter = 31.8 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

(can use only Shimano Top swing)

Bottom bracket shell width = 73 mm

Freehub width = 135 mm or 150mm

(MDE Dropouts system)

Shock length = 200mm or 190mm

Shock travel = 57mm or 50mm

Shock pivot width front = 22mm

Shock pivot width rear = 40mm

Shock bolt diameter = 8mm

Rear wheel travel = 140mm (with 200mm shox)

or 110mm (with 190mm shox)

Tire maximum clearance = 26 x 2.7, 24x3.0

Rear derailleur hanger type = MDE

Dropouts system

Weight = 3.25 Kg

FOR GEOMETRY SEE ALSO THE MANUAL

MDE DROPOUTS SYSTEM AVAILABLE:

1° 135X10MM VERTICAL I.S. DISC MOUNTING

2° 135X12MM VERTICAL I.S. DISC MOUNTING

3° 135X12MM TRUE AXLE FRONT POST MOUNT DISC

4° 150X12MM TRUE AXLE FRONT POST MOUNT DISC

5° 135X12MM MAXLE FRONT POST MOUNT DISC

6° 150X12MM MAXLE FRONT POST MOUNT DISC




STANDARD COLORS

FLUO YELLOW

RAW

ROYAL RED

PURE WHITE



gEomEtry

AVAILABLE SHOX:

FOX DHX 5.0 COIL

FOX DHX 5.0 AIR

MARZOCCHI ROCO RC WC

MARZOCCHI ROCO TST R

MARZOCCHI ROCO RC WC AIR

MARZOCCHI ROCO TST R AIR

ROCK SHOX MONARCH

ROCK SHOX VIVID

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S/M	322	370	560	550	718	74°	67.5°	110	423	345	1100	545	160	155-175 cm
M/L	368	410	585	566	718	74°	67.5°	120	423	345	1129	545	160	175-190 cm



BOLDER SPECIAL 2010

TYPE: FREERIDE

TUBESET: EASTON FS RAD WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: MONOCROSS, ERGAL PIVOT AND ENDURO BEARINGS

REAR SHOCK (STANDARD): MARZOCCHI ROCO TST R (200X57)

WHEEL TRAVEL: VARIABLE 160-180 (200 mm standard shox)

DROPOUTS: CNC REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 3.65 KG (200mm COIL shox)

SIZE: XS (WOMEN), S, M, L

STANDARD COLORS (POWDER COATING): Fluo yellow, Fluo Green, Royal Red, Pure White

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

TECHNICAL INFORMATIONS:

eat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1.5"

Headset type = normal

Fork type = 150 - 200mm

Brake type = disc only

Front derailleur diameter = 31.8 mm

Front derailleur cable route = down pull

Front derailleur type = top swing

Bottom bracket shell width = 73mm

ISCG = 03' and 05' standard

Freehub width = 135 mm

Shock length = 200mm or 216mm

Shock travel = 50mm (200mm air)

56mm (200mm coil)

Shock pivot width front = 22mm

Shock pivot width rear = 48mm

Shock bolt diameter = 8mm

Rear wheel travel = 140-160mm (190mm SHOX)


160-180mm (200mm SHOX)

Tire maximum clearance = 26 x 2.7, 24x3.0

Rear derailleur hanger type = mde 1

Weight = 3.35 Kg (air), 3.65 Kg (coil)

FOR GEOMETRY SEE ALSO THE MANUAL

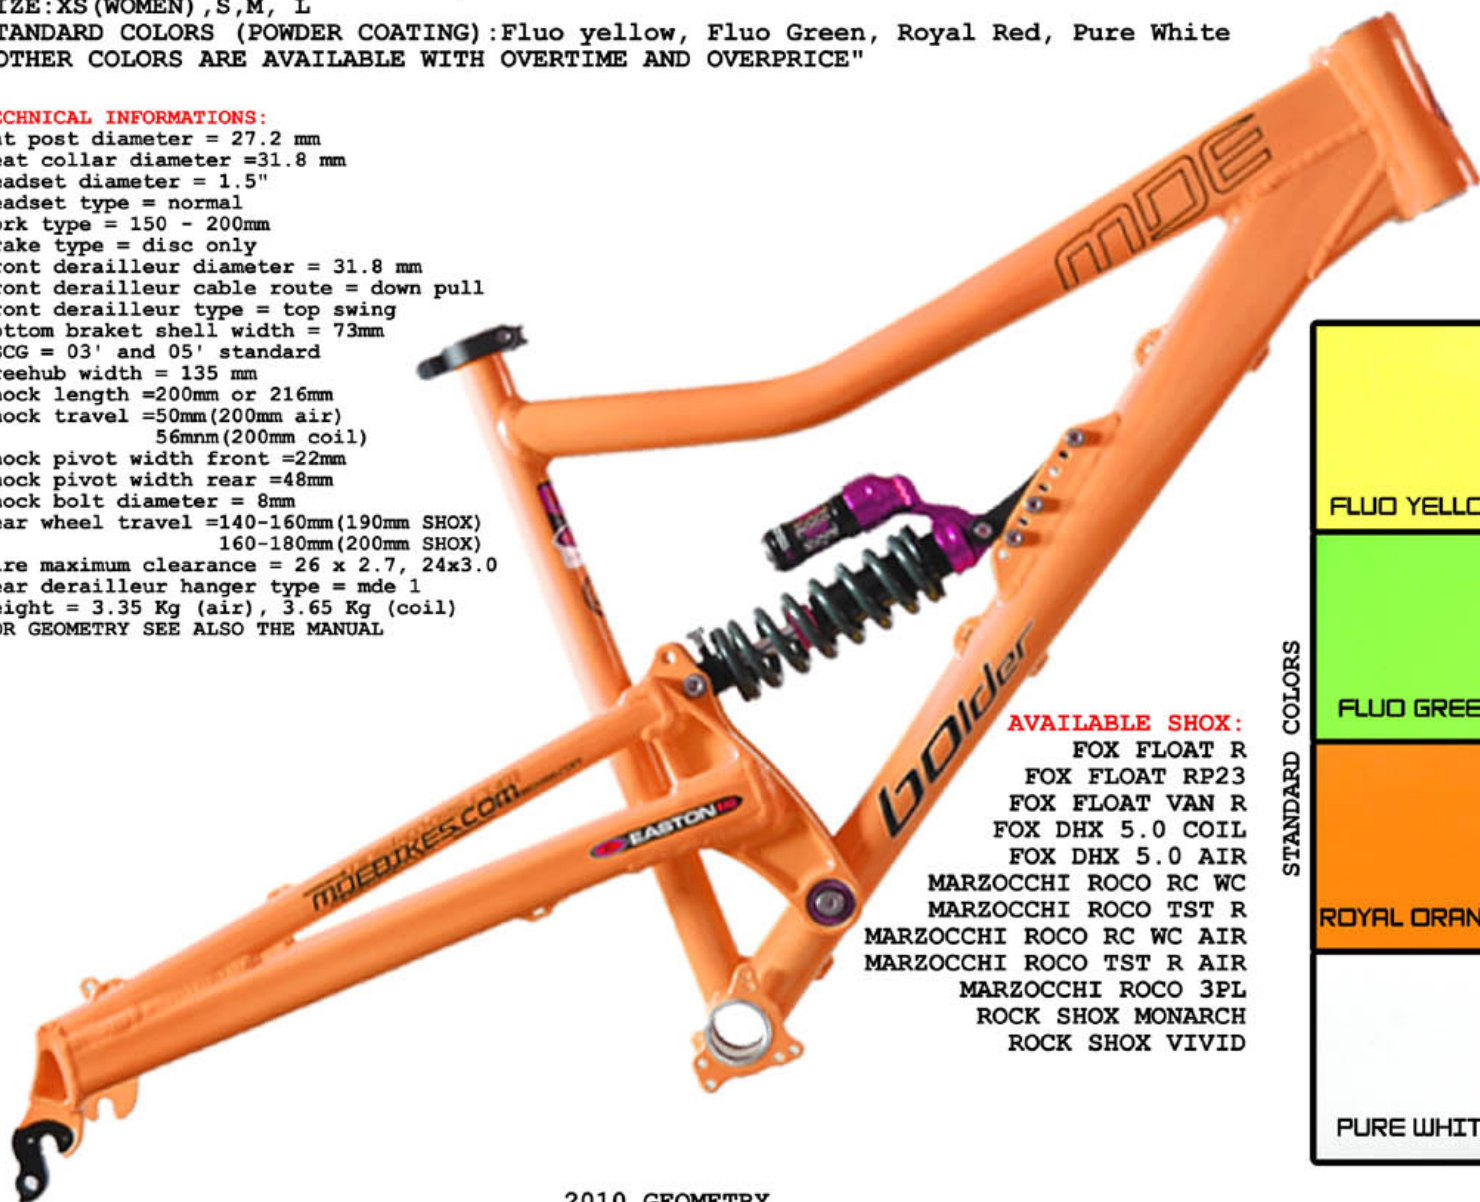

AVAILABLE SHOX:

FOX FLOAT R

FOX FLOAT RP23

FOX FLOAT VAN R

FOX DHX 5.0 COIL

FOX DHX 5.0 AIR

MARZOCCHI ROCO RC WC

MARZOCCHI ROCO TST R

MARZOCCHI ROCO RC WC AIR

MARZOCCHI ROCO TST R AIR

MARZOCCHI ROCO 3PL

ROCK SHOX MONARCH

ROCK SHOX VIVID

STANDARD COLORS

FLUO YELLOW

FLUO GREEN


ROYAL ORANGE

PURE WHITE

2010 GEOMETRY

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
XS	325	370	540	524	737	72°	66°	110	430	360	1085	579	180	145-160 cm
S	345	390	560	534	758	72°	66°	120	430	360	1085	579	180	160-170 cm
M	385	430	590	561	765	72°	66°	120	430	360	1115	579	180	170-185 cm
L	415	460	615	585	785	72°	66°	120	430	360	1140	579	180	185-200 cm

NOTE: "S" SIZE WITH STRAIGHT TOP TUBE (OTHER WITH CURVE TOP TUBE)
CUSTOM MADE FRAME MANUFACTURING ARE AVAILABLE.

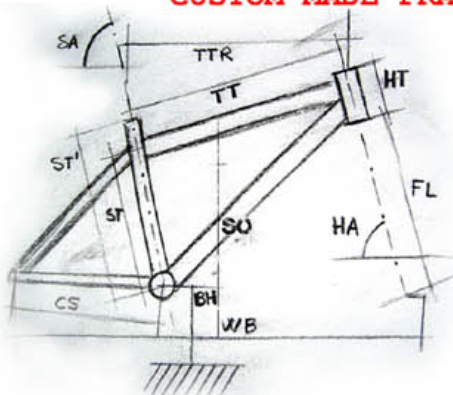

DAMPER I-LINK 2010

TYPE: ALL MOUNTAIN or ENDURO

TUBESET: DEDACCAI 7003 CUSTOM SHAPE FOR MDE WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: MDE OWNER I-LINK SYSTEM, **NEW 2010 ERGAL PIVOT** AND SPECIAL "ENDURO BEARINGS"

REAR SHOCK (STANDARD): ROCK SHOX MONARCH 4.2 HIGH VOLUME E TUNE

WHEEL TRAVEL: 158MM (200MM SHOX), 138MM (190MM SHOX)

DROPOUTS: CNC REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 3.10KG ("M" SIZE ANODIZED WITH RS MONARCH 4.2)

SIZE: S, M, L, XL

STANDARD COLOURS (POWDER COATING): Fluo Green, Royal Red, Royal Blue, Royal Black

(FOR STANDARD COLORS LINKS AND DROPOUTS ARE BLACK ANODIZED)

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

WHIT ANODIZATION SAVE 100g

MAGNESIUM UPPER LINK (OPTIONAL) SAVE 40g

TECHNICAL INFORMATIONS:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 130 - 180mm

Brake type = disc only

Front derailleur diameter = 31.8 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

Bottom bracket shell width = 73 mm

Freehub width = 135 mm

Shock length = 200mm (OR 190MM)

Shock travel = 56mm (200mm shox)

50mm (190mm shox)

Shock pivot width front = 22mm

Shock pivot width rear = 40mm

Shock bolt diameter = 8mm

Rear wheel travel = 158mm (200mm shox)

138mm (190mm shox)

Tire maximum clearance = 26 x 2.5

Rear derailleur hanger type = mde 1

Weight = 3.00 Kg



STANDARD COLORS

FLUO GREEN

ROYAL RED

ROYAL BLUE

ROYAL BLACK

AVAILABLE SHOX:

FOX FLOAT R

FOX FLOAT RP23

FOX FLOAT VAN R

FOX DHX 5.0 COIL

FOX DHX 5.0 AIR

MARZOCCHI ROCO RC WC

MARZOCCHI ROCO TST R


MARZOCCHI ROCO RC WC AIR

MARZOCCHI ROCO TST R AIR

MARZOCCHI ROCO 3PL

ROCK SHOX MONARCH

ROCK SHOX VIVID



geometRy.

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S	323	390	556	540	73°	67°	100	438	350	1110	558	165	150-165 cm
M	370	430	580	557	73°	67°	107	438	350	1135	558	165	165-175 cm
L	400	460	603	577	73°	67°	115	438	350	1159	558	165	175-185 cm
XL	431	490	628	601	73°	67°	120	438	350	1184	558	165	185-200 cm



BOLDER MX 2010

TYPE: ALL MOUNTAIN or ENDURO

TUBESET: DEDACCIAI 7003 CUSTOM FOR MDE WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: MONOCROSS, WHIT NEW ERGAL PIVOT AND ENDURO BEARINGS

REAR SHOCK: ROCK SHOX MONARCH 4.2 WITH MOTION CONTROL DAMPING CONTROL AND REBOUND DAMPING

WHEEL TRAVEL: 140-160 (190mm standard shox)

DROPOUTS: CNC REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 3.10KG (190mm AIR shox)

SIZE: XS (WOMEN), S, M, L

STANDARD COLORS (POWER COATING): Fluo Yellow, Fluo Green, Royal Red, Pure White

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 130 - 170mm

Brake type = disc only

Front derailleur diameter = 31.8 mm

Front derailleur cable route = down pull

Front derailleur type = top swing

Bottom bracket shell width = 73mm

ISCG: only on request ('03 and '05)

Freehub width = 135 mm

Shock length = 190 OR 200mm

Shock travel = 50mm (190mm shox)

56mm (200mm shox)

Shock pivot width front = 22mm

Shock pivot width rear = 48mm

Shock bolt diameter = 8mm

Rear wheel travel = 140-160mm (190mm shox)

160-180mm (200mm shox)

Tire maximum clearance = 26 x 2.7, 24x3.0

Rear derailleur hanger type = mde 1

Weight = 3.10Kg (air), 3.55 Kg (coil)

FOR GEOMETRY SEE ALSO THE MANUAL



AVAILABLE SHOX:

FOX FLOAT R

FOX FLOAT RP23

FOX FLOAT VAN R

FOX DHX 5.0 COIL

FOX DHX 5.0 AIR

MARZOCCHI ROCO RC WC

MARZOCCHI ROCO TST R

MARZOCCHI ROCO RC WC AIR

MARZOCCHI ROCO TST R AIR

MARZOCCHI ROCO 3PL

ROCK SHOX MONARCH

ROCK SHOX VIVID

STANDARD COLORS

FLUO YELLOW

FLUO GREEN


ROYAL RED

PURE WHITE

2010 GEOMETRY

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	FORK TRAVEL	RIDER HT
XS (WM)	342	390	540	529	753	73°	67°	110	430	350	1088	538	150	145-160 cm
S	362	410	560	543	790	73°	67°	110	430	350	1106	538	150	160-170 cm
M	392	450	590	569	792	73°	67°	120	430	350	1145	538	150	170-185 cm
L	432	490	615	591	811	73°	67°	120	430	350	1158	538	150	185-200 cm

NOTE: "S" SIZE WITH STRAIGHT TOP TUBE (OTHER WITH CURVE TOP TUBE)
CUSTOM MADE FRAME MANUFACTURING ARE AVAILABLE.

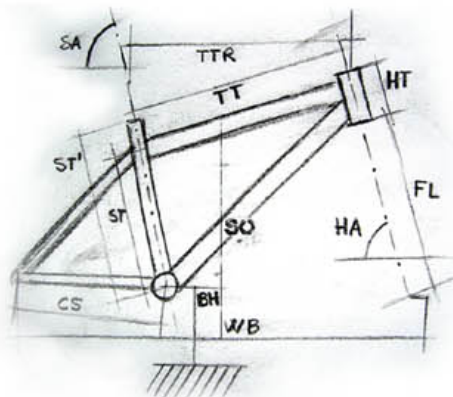

CARVER I-LINK 2010

TYPE: MOUNTAIN TRAIL

TUBESET: DEDACCAI 7003 CUSTOM SHAPE FOR MDE WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: MDE OWNER I-LINK SYSTEM, **NEW 2010 ERGAL PIVOT** AND SPECIAL "ENDURO BEARINGS"

REAR SHOCK (STANDARD): ROCK SHOX MONARCH 4.2 HIGH VOLUME E TUNE 200X56MM

WHEEL TRAVEL: 140MM (with 200x56mm shox standard setting)

ON REQUEST TRAVEL: 120MM ONLY ON REQUEST (with 190x51mm shox)

DROPOUTS: CNC REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 2.65KG ("M" SIZE ANODIZED WITH MONARCH 4.2 AND WITH MAGNESIUM CNC TOP LINK)

SIZE: XS, S, M, L, XL

STANDARD COLORS (POWDER COATING): Royal Black, Royal Red, Royal Orange, Pure White

(FOR STANDARD COLORS LINKS AND DROPOUTS ARE BLACK OR RED ANODIZED)

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

WHIT ANODIZATION SAVE 100g

MAGNESIUM UPPER LINK (OPTIONAL) SAVE 40g

TECHNICAL INFORMATIONS:

Seat post diameter = 30.9 mm

Seat collar diameter = 34.9 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 100 - 150mm

Brake type = disc only

Front derailleur diameter = 34.9 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

(can use only Shimano top swing)

Bottom bracket shell width = 73 mm

Freehub width = 135 mm

Shock length = 200mm

Shock travel = 56mm

Shock pivot width front = 22mm

Shock pivot width rear = 40mm


Shock bolt diameter = 8mm

Rear wheel travel = 140mm (56mm shox)

Tire maximum clearance = 26 x 2.5

Rear derail. hanger type = mde 1

Weight = 2.75Kg



AVAILABLE SHOX:

FOX FLOAT R

FOX FLOAT RP23

FOX DHX 5.0 AIR

MARZOCCHI ROCO RC WC AIR

MARZOCCHI ROCO TST R AIR

MARZOCCHI ROCO 3PL

ROCK SHOX MONARCH

STANDARD COLORS

ROYAL BLACK

ROYAL RED

ROYAL ORANGE


PURE WHITE

geometRy.

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S	333	390	555	538	700	72.5°	68°	100	430	336	1083	520	140	150-165 cm
M	373	430	580	557	718	72.5°	68.5°	107	430	336	1098	520	140	165-175 cm
L	423	480	605	579	756	72.5°	68.5°	115	430	336	1128	520	140	175-185 cm
XL	453	510	630	604	780	72.5°	69°	125	430	336	1145	520	140	185-200 cm

NOTE: 120mm TRAVEL VERSION ONLY ON REQUEST (THE STANDARD VERSION HAVE 200MM SHOX AND IT'S NO POSSIBLE USE THE 190MM SHOX)

CUSTOM MADE FRAME MANUFACTURING ARE AVAILABLE.

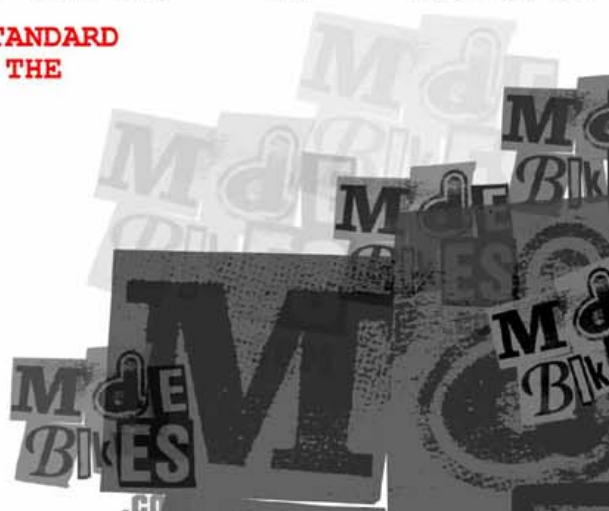

CUDGEL I-LINK 2010

TYPE: MARATHON/XC

TUBESET: DEDACCAI 7003 CUSTOM FOR MDE WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: MDE OWNER I-LINK SYSTEM, **NEW 2010 ERGAL PIVOT** AND SPECIAL "ENDURO BEARINGS"

REAR SHOCK (STANDARD): ROCK SHOX MONARCH 4.2

WHEEL TRAVEL: 100mm

DROPOUTS: CNC REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 2.55KG ("M" SIZE, ANODIZED AND WITH MAGNESIUM CNC TOP LINK)

SIZE: S, M, L, XL

STANDARD COLORS (POWDER COATING): Fluo Green, Royal Red, Royal Black, Pure White
(FOR STANDARD COLORS LINKS AND DROPOUTS ARE BLACK OR RED ANODIZED)

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

WHIT ANODIZATION SAVE 100g

MAGNESIUM UPPER LINK (OPTIONAL) SAVE 40g

TECHNICAL INFORMATIONS:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 80 - 115mm

Brake type = V-brake or disc

Front derailleur diameter = 31.8 mm

Front derailleur cable route = down pull

Front derailleur type = down swing

(can use only Shimano top swing)

Bottom bracket shell width = 68 mm

Freehub width = 135 mm

Shock length = 165mm

Shock travel = 38mm

Shock pivot width front = 22mm

Shock pivot width rear = 36mm

Shock bolt diameter = 6mm (rear), 8mm (front)

Rear wheel travel = 90mm

Tire maximum clearance = 26 x 2.3

Rear derailleur hanger type = mde 1

Weight = 2.55 Kg



AVAILABLE SHOX:

FOX FLOAT R

FOX FLOAT RP23

MARZOCCHI ROCO 3PL


ROCK SHOX MONARCH

FLUO GREEN

ROYAL RED

ROYAL BLACK

PURE WHITE



geometRy.

SIZE	ST	ST'	TTR	TT	SO	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S	333	390	560	545	677	74°	69°	110	425	323	1000	488	100	150-165 cm
M	373	430	585	565	700	74°	69.5°	115	425	323	1100	488	100	165-175 cm
L	423	480	610	590	740	74°	69.5°	120	425	323	1125	488	100	175-185 cm
XL	453	510	640	620	764	74°	70°	130	425	323	1150	488	100	185-200 cm

NOTE: CUSTOM MADE FRAME MANUFACTURING AVAILABLE.

29" WHEELS GEOMETRY AVAILABLE.



ANVIL 2010

TYPE: STREET AND DIRT FRAME
 TUBESET: DEDACCAI 7003 CUSTOM WITH SQUARE
 CHAIN AND RECTANGULAR STAYS
 MANUFACTURE: TIG WELDING AND CNC PARTS
 SYSTEM: HARD TAIL
 DROPOUTS: CNC REPLACEABLE AND VARIABLE CHAIN
 LENGTH AND SINGLE SPEED READY (MDE DROPOUTS SYSTEM)
 MORE: 12MM AXEL REAR HUB AVAILAIBLE
 WEIGHT: 2,0KG ("S" SIZE POWDER COATING)
 SIZE: S, M
 STANDARD COLORS (POWDER COATING): Fluo yellow, Fluo Green, Royal Red, Pure White
 (FOR STANDARD COLORS DROPOUTS ARE BLACK ANODIZED)
 "OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"
 NOTE: V-BRAKE PIVOT'S ONLY ON REQUEST

TECHNICAL INFORMATIONS:


Seat post diameter = 27.2 mm
 Seat collar diameter = 31.8 mm
 Headset diameter = 1 1/8
 Headset type = normal
 Fork type = 100 - 150
 Brake type = V- brake or disc
 Front derailleur diameter = 31.8 mm
 Front derailleur cable route = top pull
 Front derailleur type = top swing
 Bottom bracket shell width = 68 mm
 Freehub width = 135 mm
 Shock length = --
 Shock travel = --
 Shock pivot width front = --
 Shock pivot width rear = --
 Shock bolt diameter = --
 Rear wheel travel = --
 Tire maximum clearance = 26 x 2.5, 24x2,7
 Rear derailleur hanger type = mde 1
 Weight = 2.1 Kg

MDE DROPOUTS SYSTEM AVAILABLE:

- 1° 135X10MM VERTICAL I.S. DISC MOUNTING (ALSO SINGLE SPEED)
- 2° 135X12MM VERTICAL I.S. DISC MOUNTING (ALSO SINGLE SPEED)
- 3° 135X12MM TRUE AXLE FRONT POST MOUNT DISC
- 4° 150X12MM TRUE AXLE FORNT POST MOUNT DISC
- 5° 135X12MM MAXLE FORNT POST MOUNT DISC
- 6° 150X12MM MAXLE FORNT POST MOUNT DISC



geometry



STANDARD COLORS

FLUO YELLOW

FLUO GREEN

ROYAL RED

ROYAL PURPLE

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	FORK	RIDER HT
S	269	320	560	555	73°	68.5°	100	385/405	318	1033	490	100mm	155-175 cm
M	269	320	585	577	73°	68.5°	100	385/405	318	1058	490	100mm	175-190 cm
S	269	320	555	555	74°	69.5°	100	385/405	318	1023	470	80mm	155-175 cm
M	269	320	580	577	74°	69.5°	100	385/405	318	1048	470	80mm	175-190 cm



KEEPER 2010

TYPE: ALLMOUNTAIN HARD TAIL

TUBESET: DEDACCIAl 7003 CUSTOM WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: HARD TAIL

DROPOUTS: REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 1.80KG ("M" SIZE ANODIZED)

SIZE: S, M, L, XL

TANDARD COLORS (POWDER COATING): Fluo Green, Royal Red, Royal Blue, Pure White

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

NOTE: V-BRAKE PIVOT'S ONLY ON REQUEST

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 100 - 150mm

Brake type = disc (V brake only on request)

Front derailleur diameter = 31.8 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

Bottom bracket shell width = 68 mm

Freehub width = 135 mm

Shock length = --

Shock travel = --

Shock pivot width front = --

Shock pivot width rear = --

Shock bolt diameter = --

Rear wheel travel = --


Tire maximum clearance = 26 x 2.5, 24x2.7

Rear derailleur hanger type = mde 1

Weight = 1.85 Kg



geometRy.



STANDARD COLORS

FLUO GREEN

ROYAL RED

ROYAL BLUE

PURE WHITE

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S	324	390	555	535	72°	68.5°	105	420	328	1052	500	140	155-170 cm
M	344	430	575	550	72°	68.5°	110	420	328	1072	500	140	170-180 cm
L	365	460	595	568	72°	68.5°	115	420	328	1092	500	140	180-190 cm
XL	395	490	620	592	72°	68.5°	130	420	328	1122	500	140	190-200 cm

NOTE: CUSTOM MADE FRAME MANUFACTURING ARE AVAILABLE.



KEEPER 4X 2010

TYPE: 4X RACE HARDTAIL

TUBESET: DEDACCAI 7003 CUSTOM WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: HARD TAIL

DROPOUTS: CNC REPLACEABLE, SIX DIFFERENT VERSION ARE AVAILABLE (MDE DROPOUTS SYSTEM)

WEIGHT: 2,0KG ("S" SIZE POWDER COATING)

SIZE: S, M

STANDARD COLORS (POWDER COATING): Fluo yellow, Raw, Royal Red, Pure White

(FOR STANDARD COLORS DROPOUTS ARE BLACK ANODIZED)

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

NOTE: V-BRAKE PIVOT'S ONLY ON REQUEST

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1 1/8

Headset type = normal

Fork type = 100 - 150

Brake type = V-brake or disc

Front derailleur diameter = 31.8 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

Bottom bracket shell width = 68 mm

Freehub width = 135 OR 150 MDE DROPOUTS SYSTEM

Shock length = --

Shock travel = --

Shock pivot width front = --

Shock pivot width rear = --

Shock bolt diameter = --

Rear wheel travel = --

Tire maximum clearance = 26 x 2.5, 24x2.7

Rear derailleur hanger type = MDE DROPOUTS SYSTEM

Weight = 2.1 Kg

MDE DROPOUTS SYSTEM AVAILABLE:

1° 135X10MM VERTICAL I.S. DISC MOUNTING

2° 135X12MM VERTICAL I.S. DISC MOUNTING

3° 135X12MM TRUE AXLE FRONT POST MOUNT DISC

4° 150X12MM TRUE AXLE FRONT POST MOUNT DISC

5° 135X12MM MAXLE FRONT POST MOUNT DISC

6° 150X12MM MAXLE FRONT POST MOUNT DISC



FLUO YELLOW


RAW

ROYAL RED

PURE WHITE

STANDARD COLORS

geometRy.



SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	FORK	RIDER HT
S/M	294	360	566	555	73°	67.5°	100	400	315	1060	495	110mm	155-175 cm
M/L	294	360	586	572	73°	67.5°	100	400	315	1080	495	110mm	175-190 cm

(CUSTOM MADE ARE AVAILABLE)



SLIDER 2010

TYPE:XC RACE, MARATHON

TUBESET:DEDACCIAl ALUMINIUM 7003 CUSTOM FOR MDE

MANUFACTURE:TIG WELDING AND CNC PARTS

SYSTEM: HARD TAIL

DROPOUTS: REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT:1.45kg ("M" SIZE ANODIZED)

MEN SIZE:13.5,15,16,17,18,19,20,21

WOMEN SIZE:WXS,WS,WM,WL

STANDARD COLORS (POWDER COATING): Fluo Green, Royal Red,Royal Blue, Pure White

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

NOTE: V-BRAKE PIVOT'S ONLY ON REQUEST

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 80 - 105mm

Brake type = disc(V-brake on request)

Front derailleur diameter = 31.8 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

Bottom bracket shell width = 68 mm

Freehub width = 135 mm

Shock length = --

Shock travel =

Shock pivot width front = --

Shock pivot width rear = --

Shock bolt diameter = --

Rear wheel travel = --

Tire maximum clearance = 26 x 2.3

Rear der. hanger type = mde 1

Weight = 1.45 Kg



STANDARD COLORS



geometRy.


26" WHEELS MEN GEOMETRY

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
13.5	276	340	535	533	73.5°	69.5°	90	425	302	1031	473	100	140-152 cm
15	316	380	555	542	73°	69.5°	100	425	302	1046	473	100	152-160 cm
16	346	410	570	551	73°	70°	107	425	302	1056	473	100	160-168 cm
17	366	430	585	563	73°	70°	110	425	302	1071	473	100	168-175 cm
18	386	450	600	575	73°	70°	115	425	302	1086	473	100	175-183 cm
19	416	480	615	590	73°	70°	120	425	302	1101	473	100	183-191 cm
20	446	510	630	605	73°	70°	125	425	302	1116	473	100	191-199 cm
21	476	540	645	616	72.5°	70.5°	130	425	302	1118	473	100	199-210 cm

26" WHEELS WOMEN GEOMETRY

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
WXS	261	330	528	533	74°	69°	90	425	297	1032	473	100	140-154 cm
WS	303	370	543	538	74°	69°	100	425	297	1048	473	100	154-162 cm
WM	355	420	562	545	73°	69°	107	425	297	1058	473	100	162-170 cm
WL	396	460	580	557	73°	69.5°	115	425	297	1070	473	100	170-178 cm

WITH 80MM FORK HA (SA) = +1° BH = -8



SLIDER NINER (NINER SS) 2010

TYPE: XC RACE, MARATHON

TUBESET: DEDACCIAl ALUMINIUM 7003 CUSTOM FOR MDE

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: HARD TAIL 29"

DROPOUTS: REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 1.58kg ("M" SIZE ANODIZED)

SIZE: S, M, L, XL

STANDARD COLORS (POWDER COATING): Fluo Yellow, Royal Red, Royal Blue, Pure White

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

NOTE: V-BRAKE PIVOT'S ONLY ON REQUEST

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 80 - 100mm

Brake type = disc (V-brake on request)

Front derailleur diameter = 31.8 mm

Front derailleur cable route = down pull

Front derailleur type = top swing

Bottom bracket shell width = 73 mm

Freehub width = 135 mm

Shock length = --

Shock travel = --

Shock pivot width front = --

Shock pivot width rear = --

Shock bolt diameter = --

Rear wheel travel = --

Tire maximum clearance = 26 x 2.3

Rear der. hanger type = mde 1

Weight = 1.58 Kg

SINGLE SPEED VERSIONS USE THE MDE DROPOUTS SYSTEM:

1° 135X10MM VERTICAL I.S. DISC MOUNTING (ALSO SINGLE SPEED)

2° 135X12MM VERTICAL I.S. DISC MOUNTING (ALSO SINGLE SPEED)

3° 135X12MM MAXLE FRONT POST MOUNT DISC



FLUO YELLOW

ROYAL RED

ROYAL BLACK

PURE WHITE


STANDARD COLORS

geometRy.

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
S	323	390	570	561	74°	71.5	80	442	308	1032	490	80	155-168 cm
M	365	430	590	573	74°	72°	90	442	308	1048	490	80	168-178 cm
L	416	480	610	583	74°	72°	100	442	308	1058	490	80	178-188 cm
XL	447	510	630	606	74°	72°	110	442	308	1070	490	80	188-200 cm

SINGLE SPEED VERSION CS=435-447 HA=-1°

WITH 100MM FORK HA(SA)=-1° BH=316



SLIDER LADY 2010

TYPE:XC RACE, MARATHON

TUBESET:DEDACCIAl ALUMINIUM 7003 CUSTOM FOR MDE

MANUFACTURE:TIG WELDING AND CNC PARTS

SYSTEM: HARD TAIL

DROPOUTS: REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT:1.45kg ("M" SIZE ANODIZED)

MEN SIZE:13.5,15,16,17,18,19,20,21

WOMEN SIZE:WXS,WS,WM,WL

STANDARD COLORS (POWDER COATING): Fluo Green, Royal Red,Royal Blue, Pure White

"OTHER COLORS ARE AVAILABLE WITH OVERTIME AND OVERPRICE"

NOTE: V-BRAKE PIVOT'S ONLY ON REQUEST

TECHNICAL INFORMATION:

Seat post diameter = 27.2 mm

Seat collar diameter = 31.8 mm

Headset diameter = 1" 1/8

Headset type = normal

Fork type = 80 - 105mm

Brake type = disc(V-brake on request)

Front derailleur diameter = 31.8 mm

Front derailleur cable route = top pull

Front derailleur type = top swing

Bottom bracket shell width = 68 mm

Freehub width = 135 mm

Shock length = --

Shock travel =

Shock pivot width front = --

Shock pivot width rear = --

Shock bolt diameter = --

Rear wheel travel = --

Tire maximum clearance = 26 x 2.3

Rear derailleur hanger type = mde 1

Weight = 1.45 Kg



geometry

FLUO GREEN

ROYAL RED

ROYAL BLACK


PURE WHITE

STANDARD COLORS

26" WHEELS WOMEN GEOMETRY

SIZE	ST	ST'	TTR	TT	SA	HA	HT	CS	BH	WB	FL	fork travel	RIDER HT
WXS	261	330	528	533	74°	69°	90	425	297	1032	473	100	140-154 cm
WS	303	370	543	538	74°	69°	100	425	297	1048	473	100	154-162 cm
WM	355	420	562	545	73°	69°	107	425	297	1058	473	100	162-170 cm
WL	396	460	580	557	73°	69.5°	115	425	297	1070	473	100	170-178 cm

WITH 80MM FORK HA(SA)=+1° BH=-8



TANDEM I-LINK I-LINK 2010

TYPE: ALL MOUNTAIN or ENDURO

TUBESET: DEDACCAI 7003 CUSTOM SHAPE FOR MDE WITH SQUARE CHAIN AND RECTANGULAR STAYS

MANUFACTURE: TIG WELDING AND CNC PARTS

SYSTEM: MDE OWNER I-LINK SYSTEM, ERGAL PIVOT AND SPECIAL "ENDURO BEARINGS"

REAR SHOCK (STANDARD): ROCK SHOX MONARCH 4.2 HIGH VOLUME E TUNE

WHEEL TRAVEL: 158MM (200MM SHOX), 138MM (190MM SHOX)

DROPOUTS: CNC REPLACEABLE DERAILLEUR HANGER INTERNATIONAL STANDARD DISC MOUNT

WEIGHT: 3.10KG ("M" SIZE ANODIZED WITH RS MONARCH 4.2)

SIZE: S, M, L, XL

COLORS: ALL MDE PAINTING COLORS



ONLY AVAILABLE CUSTOM MADE



MDE DROPOUTS SYSTEM AVAILABLE:

- 1° 135X10MM VERTICAL I.S. DISC MOUNTING
- 2° 135X12MM VERTICAL I.S. DISC MOUNTING
- 3° 135X12MM TRUE AXLE FRONT POST MOUNT DISC
- 4° 150X12MM TRUE AXLE FRONT POST MOUNT DISC
- 5° 135X12MM MAXLE FRONT POST MOUNT DISC
- 6° 150X12MM MAXLE FRONT POST MOUNT DISC

AVAILABLE SHOX:


- FOX FLOAT R
- FOX FLOAT RP23
- FOX FLOAT VAN R
- FOX DHX 5.0 COIL
- FOX DHX 5.0 AIR
- MARZOCCHI ROCO RC WC
- MARZOCCHI ROCO TST R
- MARZOCCHI ROCO RC WC AIR
- MARZOCCHI ROCO TST R AIR
- MARZOCCHI ROCO 3PL
- ROCK SHOX MONARCH
- ROCK SHOX VIVID

TECHNICAL INFORMATION:

- Seat post diameter = 27.2 mm
- Seat collar diameter = 31.8 mm
- Headset diameter = 1" 1/8
- Headset type = normal
- Fork type = 130 - 180mm
- Brake type = disc only
- Front derailleur diameter = 31.8 mm
- Front derailleur cable route = top pull
- Front derailleur type = top swing (can use only Shimano top swing)
- Front BB shell width = 68mm
- Rear BB shell width = 73 mm
- Freehub width = 135 mm
- Shock length = 190MM
- Shock travel = 50mm
- Shock pivot width front = 22mm
- Shock pivot width rear = 40mm
- Shock bolt diameter = 8mm
- Rear wheel travel = 140mm
- Maximum clearance = 26 x 2.5
- Rear derailleur hanger type = mde 1
- Weight = 5.40Kg



NEW I-LINK PIVOT SYSTEM

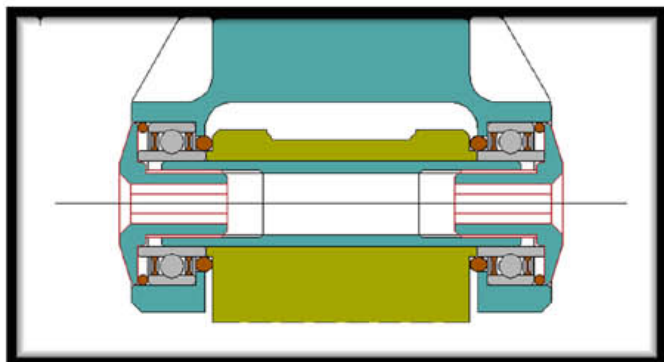

STANDARD MOUNTING ON ALL 2010
I-LINK AND DH-LINK FRAMES
SAVE 50g FROM THE OTHER VERSION

MDE DROPOUTS SYSTEM



MDE DROPOUTS SISTEM 1
135X10 VERTICAL IS DISC MOUNT



MDE DROPOUTS SISTEM 1 SINGLE SPEED
135X10 VERTICAL IS DISC MOUNT



MDE DROPOUTS SISTEM 2
135X12 VERTICAL IS DISC MOUNT



MDE DROPOUTS SISTEM 3
135X12 THRU AXLE POST MOUNT "FRONT"



MDE DROPOUTS SISTEM 4
150X12 THRU AXLE POST MOUNT "FRONT"




MDE DROPOUTS SISTEM 5
135X12 MAXLE AXLE POST MOUNT "FRONT"



MDE DROPOUTS SISTEM 6
150X12 MAXLE AXLE POST MOUNT "FRONT"

OUR DROPOUTS SYSTEM ARE
AVAILABLE FOR:
69 FRAME
PUSHER FRAME
PLAYER FRAME
ANVIL FRAME
KEEPER 4X FRAME
TANDE i-LINK PUSHER FRAME

I-LINK SUSPENSION SYSTEM






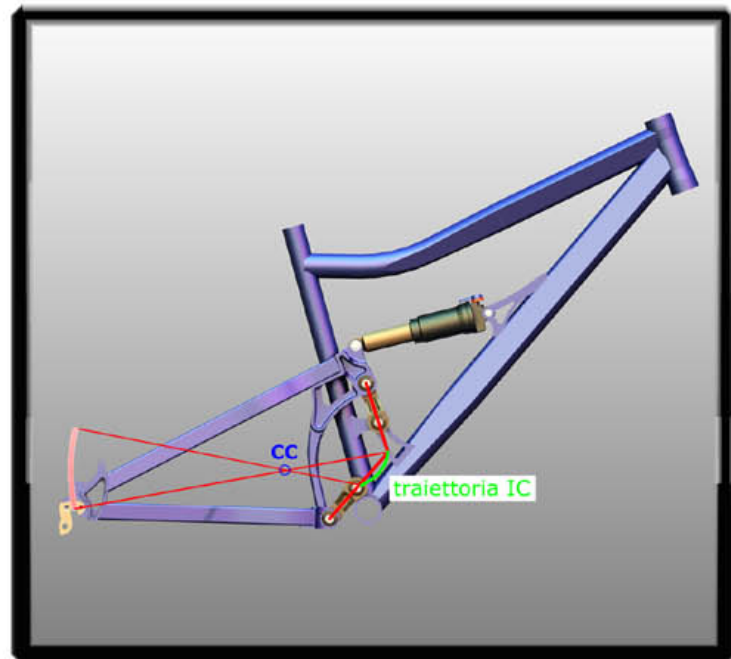





We have been searching for a system that we could trust as the monopivot, that we have been using so far. We wanted something more. A system as fast as the monocross but with the absorption capacity of the parallelograms, with an excellent stability when pedalling but with an excellent sensitivity to small asperities. We have analyzed in detail all the existing systems. We have done tens of models and experiments. After two years of intensive and passionate study we have developed I-Link!



I-LINK THE NEW REFERENCE FOR
MOUNTAIN BIKING SUSPENSION

MDEBIKES PAINTING FRAME COLORS (Table RAL / Pantone)


Ton	Code RAL	Pantone	PAINTING	Ton	Code RAL	Pantone	PAINTING
	RAL 9004	Black C			RAL 5000	269 C	
	RAL 9010	white			RAL 5002	653 C	
	RAL 1001	452 C			RAL 5003	654 C	
	RAL 1002	618 C			RAL 5007	5405 C	
	RAL 1004	142 C			RAL 5009	7477 C	
	RAL 1005	1255 C			RAL 5010	5405 C	
	RAL 1006	142 C			RAL 5012	279 C	
	RAL 1011	119 C			RAL 5013	654 C	
	RAL 1014	4525 C			RAL 5014	5415 C	
	RAL 1015	5865 C			RAL 5015	2728 C	
	RAL 1017	143 C			RAL 5018	5483 C	
	RAL 1018	7404 C			RAL 5019	653 C	
	RAL 1021	109 C			RAL 5020	5477 C	
	RAL 1023	109 C			RAL 5021	5483 C	
	RAL 1027	456 C			RAL 5022	534 C	
	RAL 1028	130 C			RAL 5024	646 C	
	RAL 1032	7407 C			RAL 6001	371 C	
	RAL 1034	7509 C			RAL 6002	378 C	
	RAL 2001	471 C			RAL 6003	377 C	
	RAL 2002	173 C			RAL 6004	361 C	
	RAL 2003	716 C			RAL 6005	357 C	
	RAL 2004	1585 C			RAL 6007	574 C	
	RAL 2008	165 C			RAL 6009	357 C	
	RAL 2009	152 C			RAL 6016	364 C	
	RAL 2011	159 C			RAL 6018	361 C	
	RAL 2012	157 C			RAL 6019	7486 C	
	RAL 3000	207 C			RAL 6021	5777 C	
	RAL 3002	215 C			RAL 6024	356 C	
	RAL 3003	187C			RAL 6025	7496 C	
	RAL 3004	7435 C			RAL 6027	563 C	
	RAL 3005	7435 C			RAL 6029	7483 C	
	RAL 3007	504 C			RAL 6034	563 C	
	RAL 3009	7428 C			RAL 7011	425 C	
	RAL 3012	486 C			RAL 7016	425 C	
	RAL 3014	7432 C			RAL 7023	404 C	
	RAL 3015	706 C			RAL 7032	402 C	
	RAL 3017	178 C			RAL 7035	1 C	
	RAL 3018	7418 C			RAL 7042	420 C	
	RAL 3020	385 C			800	4495 C	


	RAL 3027	1787 C		RAL 8003	4495 C
	RAL 4001	688 C		RAL 8007	147 C
	RAL 4002	208 C		RAL 8011	450 C
	RAL 4003	238 C		RAL 8012	4485 C
	RAL 4004	505 C		RAL 8017	462 C
	RAL 4005	2587 C		RAL 8023	147 C
	RAL 4006	512 C			
	RAL 4007	259 C			
	RAL 4008	254 C			
	RAL 4009	5135 C			

All the colors are available without surcharge and in dull or bright version.

Ral 9004 dull Black, Ral 9010 bright white and Ral 2004 bright orange are available in Powder Coating version (advised, more resistant to normal painting). The others colors are available only in Liquid Coating version.

MDEBIKES ANODIZED FRAMES COLORS

	BRIGHT BLACK		BRIGHT RED
	BRIGHT ORANGE		BRIGHT STEEL GREY
	BRIGHT GOLD		DULL BLACK
	DULL BLUE MEDIUM		DULL BLUE MEDIUM

	DULL BLUE LOW		DULL GREEN
	DULL NATURAL GREY		DULL ORANGE
	DULL RED		DULL STEEL GREY
	TITANIUM ANO		POLISHED
	GALVANIZED		
Our anodized colors are available with surcharge.			

MDE BIKES
VIA GRANGE PALMERO 144
10091 ALPIGNANO (TO)
ITALY
PHONE 0039(0)11-9663504
FAX 0039(0)11-9673150
www.mdebikes.com
info@mdebikes.com
sales@mdebikes.com

